


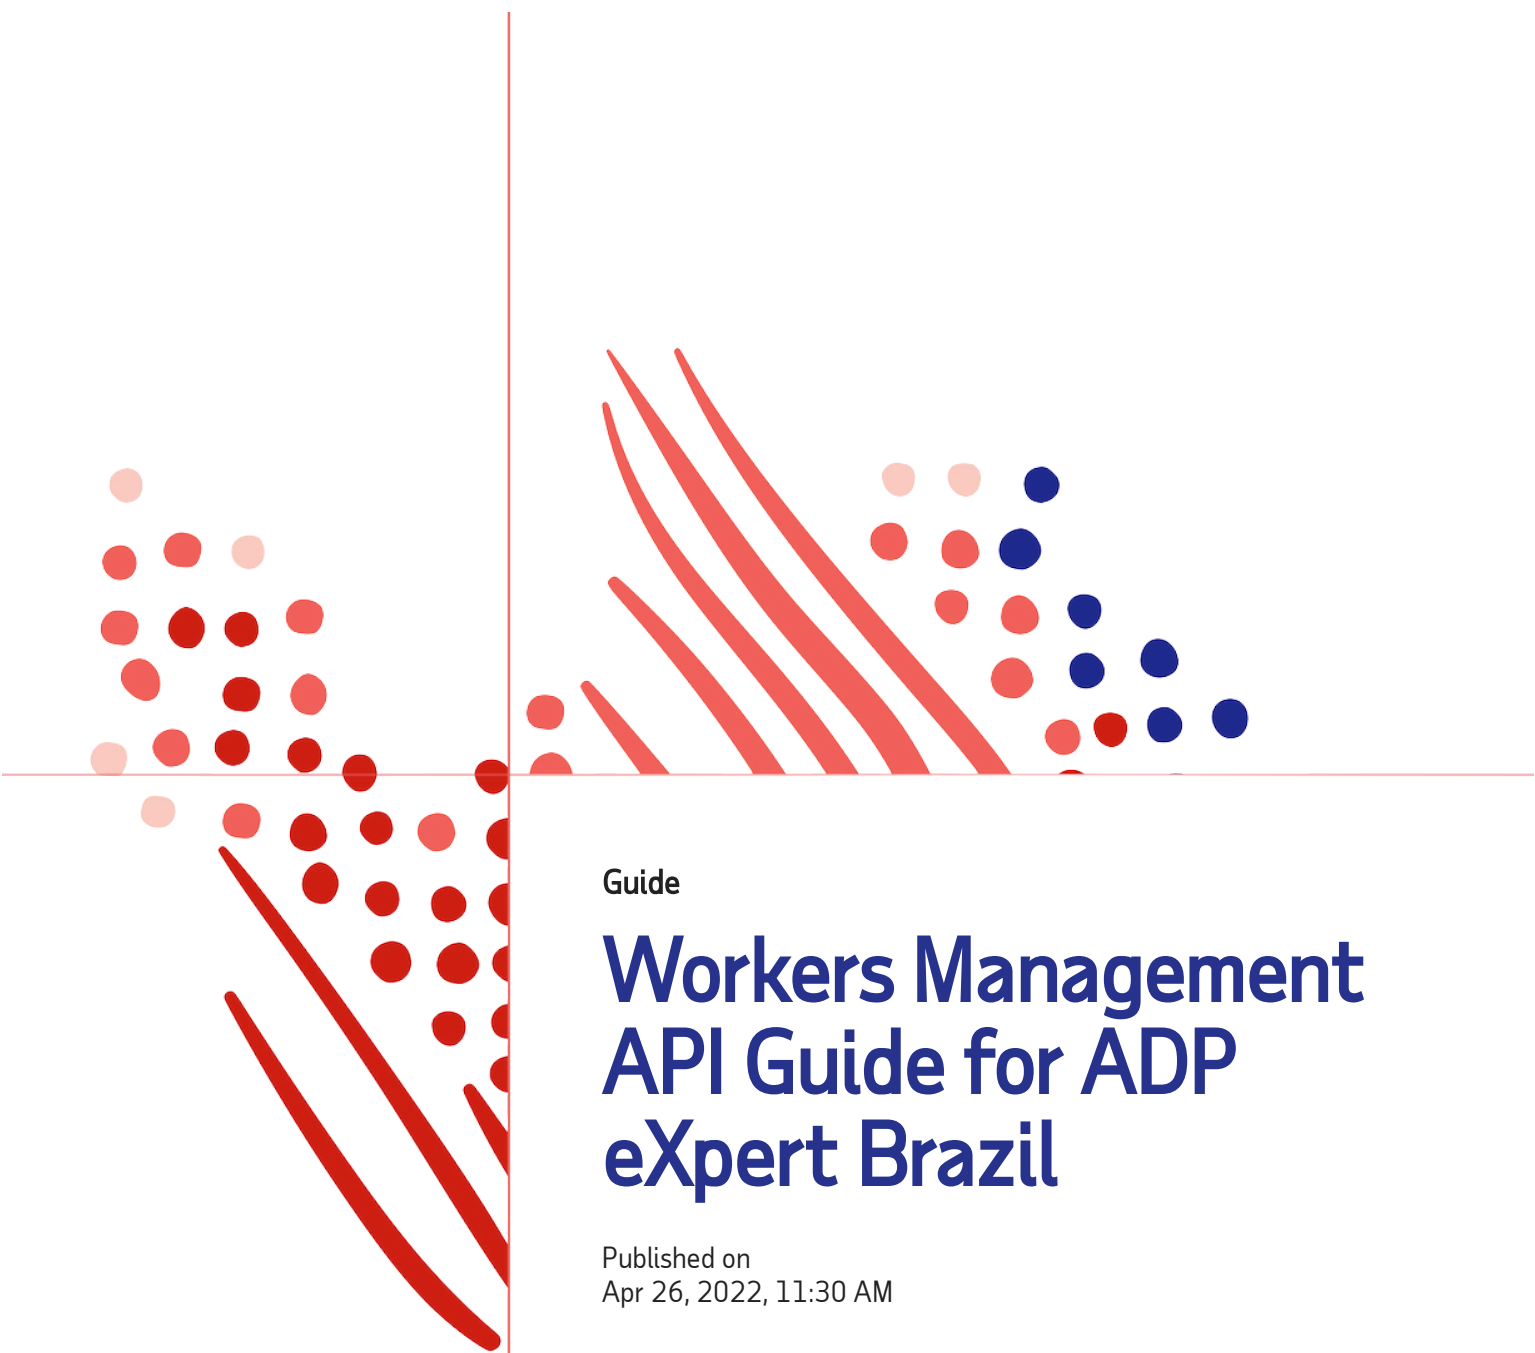


Guide

Workers Management API Guide for ADP eXpert Brazil

Published on
Apr 26, 2022, 11:30 AM

Last modified
Jul 13, 2025, 05:49 PM

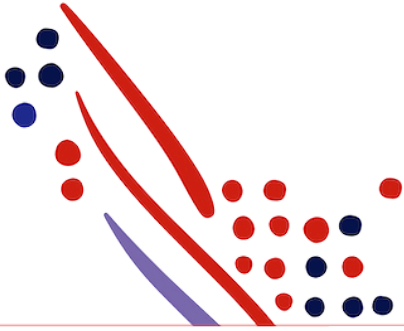

ADP Copyright Information

ADP, the ADP logo, and Always Designing for People are trademarks of ADP, Inc.

Windows is a registered trademark of the Microsoft Corporation.

All other trademarks are the property of their respective owners.

Copyright © 2025 ADP, Inc. ADP Proprietary and Confidential - All Rights Reserved. These materials may not be reproduced in any format without the express written permission of ADP, Inc.

These materials may not be reproduced in any format without the express written permission of ADP, Inc. ADP provides this publication "as is" without warranty of any kind, either expressed or implied, including, but not limited to, the implied warranties of merchantability or fitness for a particular purpose. ADP is not responsible for any technical inaccuracies or typographical errors which may be contained in this publication. Changes are periodically made to the information herein, and such changes will be incorporated in new editions of this publication. ADP may make improvements and/or changes in the product and/or the programmes described in this publication.

Published on
Apr 26, 2022, 11:30 AM

Published on
Jul 13, 2025, 05:49 PM

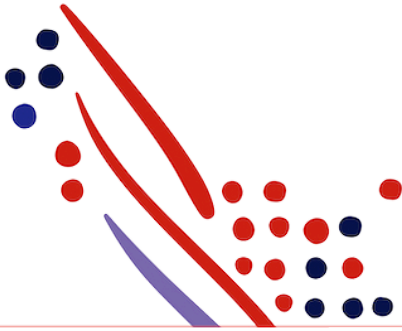


Table of Contents

Chapter 1

About this API

- Required setup steps
- Postman collections
- Before you begin
- Worker Information Types
 - Basic Worker Demographic Information
 - Full Worker Information
- Personally, Identifiable Information (PII)
- Sensitive Personal Information (SPI)

Chapter 2

Use Case: Retrieving Full Worker Information

- Before you begin
- API usage
- Scope of Application
- Supported OData Query Options
- Sequence of Interactions
- Data Dictionary
- Responses
- Available filters:

Chapter 3

Use Case: Retrieving Basic Worker Demographic Information

- Before You Begin
- API Usage
- Scope of Application
- Supported OData Query Options
- Sequence of Interactions
- Data Dictionary
- Responses

Chapter 4

Use Case: Updating Worker Personal Communications

Application Scope

API Usage

API Tables

Chapter 5

Use Case: Updating Worker Address

Application Scope

Please check the appendix F for the details on fields and data validation for these APIs.

Chapter 6

Use Case: Updating GovernmentIDs

Application Scope

API Usage

API Tables

Chapter 7

Use Case: Updating Worker Business Communications

Application Scope

API Usage

API Tables

Chapter 8

Use Case: Retrieving Updates in Worker Personal Communications

Application Scope

API Usage

API Tables

Chapter 9

Use Case: Retrieving Updates in Worker Government IDs

Application Scope

API Usage

API Tables

Chapter 10

Use Case: Updating a worker alternate ID

Application Scope

API Usage

Chapter 11

Appendices

About this API

Summary

The Worker Management API Guide for eXpert Brazil describes how your application can access and manage information about workers in the application. It helps you to determine which use case best meets your business needs.

It also guides you through the implementation of each use case.

A worker is a person who performs duties and responsibilities for an organization. In that capacity, a worker fills one or more positions through a work assignment. For a given work assignment, a worker is related to the organization as an employee or contractor

What's new in this guide

In this section, we will announce any new revisions to the Worker Management Application Programming Interface (API) and this guide.

August, 2021

- First revision of this document

August, 2022

- New version reformulating the guide to the improvements made in fields, filters and headers.

September, 2022

- New version with minor adjustments in the writing and corrections.

October 27, 2022

- New version with the addition of the github examples repository.

October 28, 2022

- New version adding the Personal Communication Update Use Case

January, 03 2023

- New version adding new fields to the Workers API data dictionary.

January, 07 2023

- New version adding the address change use case.

January, 11 2023

- New version adding the government IDs change and business communications change use cases.

August, 2023

- Change in fields, new fields and \$count command.

October, 2023

- Changes in the workerStatus and additionalRemuneration fields in the Workers API

February 05, 2024

- Adding the retrieving changes in workers' government IDs use case.

April 02, 2024

- Adding the Updating a worker alternate ID use case. This use case will be available in production in the May 05, 2024 release.

July 09, 2024

- New available filters section for the Workers API.

July, 2025

- New available fields in the Workers API.

Required setup steps

There are no required setup steps.

Postman collections

Postman allows you to import a collection of APIs, created by others, so you can try them out. For more information on Postman, see [Making your first API Call Using Postman](#)

Before you begin

ADP provides a comprehensive set of worker APIs to stay in synch with an ADP application and do the following:

- Retrieve a list of workers.
- Retrieve data for a specific worker information.
- Send worker personal e-mail changes
- Send worker personal landlines changes
- Send worker personal mobiles changes
- Send worker personal address changes
- Send worker government IDs changes
- Retrieve updates in a Worker Business Communication
- Retrieve updates in a Worker Personal Communication
- Retrieve updates in a Worker Government IDs

This guide describes the data for eXpert Brazil, with the specific fields according to the country specific information and eSocial program.

The amount of data retrieved by your application may vary based on the target ADP system and the ADP system configurations. Additionally, API controls are in place allowing you to filter the requested data based on your needs.

Worker Information Types

Basic Worker Demographic Information

If your application requires basic worker demographic information without the Personally Identifiable Information (PII) and Sensitive Personal Information (SPI) data listed in the following tables, ADP provides APIs you can implement to access that information. Worker demographic information commonly requested includes the following:

- Name
- Address
- Communication Profile
- Hire Date
- Work Status
- Work Assignment Information
 - Job Title
 - Manager / Reports to Information
 - Custom Fields

Full Worker Information

If your application requires PII and SPI data, in addition to the information included in Basic Worker Demographic Information, then ADP provides a separate set of APIs you can leverage.

Important

It is recommended you retrieve the minimum amount of worker information needed to meet your business needs.

When possible, leverage Use Case: Retrieving Basic Worker Demographic Information (worker-demographics)

Personally, Identifiable Information (PII)

Attribute	Structure JSON	Description
birthDate	/workers/person/birthDate	Specifies the birth date of the person. Follows the ISO-8601:2000 format.
governmentIDs	/workers/person/governmentIDs	Provides a list of government identifiers, such as a national identity number or a fiscal identity number (CPF)

Sensitive Personal Information (SPI)

Sensitive Personal Information (SPI)

Attribute	Structure JSON	Description
baseRemuneration	/workers/workAssignments/baseRemuneration	Specifies the base or primary pay, such as salary or wage, associated with a work assignment.
additionalRemunerations	/workers/workAssignments/additionalRemunerations	Provides de description of the additional remunerations the worker receives.

Chapter 2

Use Case: Retrieving Full Worker Information

Before you begin

Full worker information commonly requested includes the following:

- Name
- Address
- Communication Profile
- Birth Date
- Government IDs
- Personal IDs
- Hire Date
- Work Status
- Work Assignment Information, such as:
 - Job Title
 - Pay Information
 - Manager / Reports to Information
 - Custom Fields

API usage

Method	URI	Description	GitHub Sample Response Payload
GET	/hr/v2/workers	Requests the list of all available workers the requester is authorized to view.	Retrieve worker example
GET	/hr/v2/workers/{associate-oid}	Requests a single worker the requester is authorized to view.	Retrieve worker example

Scope of Application

The canonical URI corresponding to the API needs to be added in the Consumer Application Registry (CAR) for the subscription following which a user can access this API and make successful API calls.

The following canonical needs to be added to your application scope to enable this use case:

/hr/workerInformationManagement/workerManagement/workerProfileManagement/worker.read

Supported OData Query Options

This use case supports Query String Options as defined by Open Data Protocol (OData).

<i>QueryString Option</i>	Description	Example
\$top	<i>Requests the number of items in the queried collection to be included in the result.</i>	/hr/v2/workers?\$top=100
\$skip	<i>Specifies the number of items in the queried collection to be skipped and not included in the result.</i>	/hr/v2/workers?\$top=100&\$skip=100
\$filter	<i>Filters a collection of resources addressed by a request Uniform Resource Locator (URL). Only items for which the expression evaluates to true are included in the response.</i>	/hr/v2/workers? \$filter=/workers/workerDates/originalHireDate gt '2022-09-16'
\$count	<i>Returns the total amount of records available. This could be used alongside the optional filters by workerStatus and Worker Company.</i>	/hr/v2/workers?\$count

Sequence of Interactions

The following are the sequence of interactions to retrieve full worker information for a collection of workers:

1. Your consumer application makes a request for an initial collection of workers to the ADP API endpoint.
2. The ADP API endpoint responds to your consumer application with a collection of workers.
3. Your consumer application makes a request for a subsequent collection of workers to the ADP API endpoint.
4. The ADP API endpoint responds to your consumer application with a collection of workers.

Your consumer application repeats steps 3 and 4 until a until an empty workers array is returned.

Data Dictionary

See Appendix A: Data Dictionary on page for data retrieval.

Note

All listed fields are supported for this use case.

Responses

You may encounter exceptions outside your common success scenarios. You must account for these exceptions during your initial development.

Return Code	Return Condition
200 OK	Retrieves list of works with details.
200 OK	Retrieves single worker details.
200 OK	Retrieve the work response using \$top and \$skip parameters.
200 OK	Verify the following filter query for list of employees who have a certain worker ID Example <code>/hr/v2/workers?\$filter=/workers/workerDates/originalHireDate gt '2022-09-16'</code>
200 OK (empty list)	When pagination reaches the end of the page Example <code>/hr/v2/workers?\$Skip=201&\$Top=100</code>
404 Not found	It would be returned if you call the API for a non-existing AOID for instance Example <code>/hr/v2/workers/</code>
403 Forbidden	When credentials do not have access to resource, e.g. trying access an associate that is not into caller's hierarchy
406 Not acceptable	When the server cannot produce a response matching the list of acceptable values defined in the request resource Example <code>/hr/v2/workers/{aoid}</code> Headers: Accept: image/png

Available filters:

The following fields are available to use for filtering workers:

- `/workers/associateOID`
 - Filter by the Worker's associateOID
 - Example: `/workers/associateOID ge 1X00000001`
 - Operators: EQ, GE, GT
- `/workers/workerID/idValue`
 - Filter by the Worker's workerID.
 - Example: `/workers/workerID/idValue eq '01-00000017'`
 - Operators: EQ, GE, GT
- `/workers/workerDates/terminationDate`

- o Filter by the worker's termination date.
 - o Example: /workers/workerDates/terminationDate gt '2007-10-10'
 - o Operators: EQ, GE and GT
- /workers/workerDates/originalHireDate
 - o Filter by the worker's hire date
 - o Example: /workers/workerDates/originalHireDate gt '2007-10-10'
 - o Operators: EQ, GE and GT
- GovernmentIDs:
 - o In this case you must specify the document type and value being searched. The exception is the CTPS number which doesn't allow filtering.
 - o Examples:
 - /workers/person/governmentIDs/nameCode/shortName eq 'CPF' AND /workers/person/governmentIDs/idValue eq 1111111111
 - /workers/person/governmentIDs/nameCode/shortName eq 'RG' AND /workers/person/governmentIDs/idValue ge 123456789
 - /workers/person/governmentIDs/nameCode/shortName eq 'PIS' AND /workers/person/governmentIDs/idValue ge 123456789
 - o Operators:
 - EQ, GE, GT
- Alternate IDs
 - o In this case you must specify the alternate ID type and value being searched. You can filter by Global ID ("ID Global") and Worker code ("Matrícula")
 - o Examples:
 - /workers/alternateIDs/schemeCode/shortName eq 'idGlobal' AND /workers/alternateIDs/idValue ge 123456789
 - /workers/alternateIDs/schemeCode/shortName eq 'matrícula' AND /workers/alternateIDs/idValue ge 139

These fields can be combined with the company and worker status fields to narrow further the results but cannot be combined between them.

- Examples:
 - o /workers/workerDates/originalHireDate gt '2007-10-10' AND /workers/workerStatus/statusCode/shortName eq 'inactive'
 - o /workers/associateOID ge 1X00000001 AND /workers/workerStatus/statusCode/shortName eq 'inactive'
 - o /workers/workerDates/originalHireDate gt '2007-10-10' AND /workers/companiesIds/companyId eq '001'

Chapter 3

Use Case: Retrieving Basic Worker Demographic Information

Before You Begin

Full worker information commonly requested includes the following:

- Name
- Address
- Communication Profile
- Hire Date
- Work Status
- Work Assignments Information
 - o Job title
 - o Manager / Reports to Information
 - o Custom Fields

If it is not necessary to exchange sensitive personal data you can implement the Worker Demographics API to access Employee data.

The following data is excluded when you use the Worker Demographic API: Personally Identifiable Information:

- Birth Date
- Government ID number (such as social security number)
- Address Sensitive Personal Information (SPI):
- Payroll Number/code
- Identity Documents

API Usage

Method	URI	Description
GET	/hr/v2/worker-demographics	Requests the list of all available worker demographics that the requester is authorized to view.
GET	/hr/v2/worker-demographics/{associate-oid}	Requests a single worker the requester is authorized to view.

Scope of Application

The canonical URI corresponding to the API needs to be added in the Consumer Application Registry (CAR) for the subscription following which a user can access this API and make successful API calls.

The following canonical needs to be added to your application scope to enable this use case:

/hr/workerInformationManagement/workerManagement/workerProfileManagement/workerDemographic.read

Supported OData Query Options

This use case supports Query String Options as defined by Open Data Protocol (OData).

<i>Query String Option</i>	Description	Example
\$top	<i>Requests the number of items in the queried collection to be included in the result.</i>	/hr/v2/worker-demographics?\$top=100
\$skip	<i>Specifies the number of items in the queried collection to be skipped and not included in the result.</i>	/hr/v2/worker-demographics?\$top=100&\$skip=100
\$filter	<i>Filters a collection of resources addressed by a request Uniform Resource Locator (URL). Only items for which the expression evaluates to true are included in the response.</i>	/hr/v2/worker-demographics?\$filter=workers/workerID/idValue eq '001-0000001'

Sequence of Interactions

The following are the sequence of interactions to retrieve full worker information for a collection of workers:

1. Your consumer application makes a request for an initial collection of workers to the ADP API endpoint.
2. The ADP API endpoint responds to your consumer application with a collection of workers.
3. Your consumer application makes a request for a subsequent collection of workers to the ADP API endpoint.
4. The ADP API endpoint responds to your consumer application with a collection of workers.

Your consumer application repeats steps 3 and 4 until a until an empty workers array is returned.

Data Dictionary

See Appendix A: Data Dictionary on page for data retrieval.

Note

All listed fields are supported for this use case.

Responses

You may encounter exceptions outside your common success scenarios. You must account for these exceptions during your initial development.

Return Code	Return Condition
200 OK	Retrieves list of works with details.
200 OK	Retrieves single worker-demographics details.
200 OK	Retrieve the work response using \$top and \$skip parameters.
200 OK	Verify the following filter query for list of employees who have a certain worker ID Example <code>/hr/v2/worker-demographics?\$filter=workers/workerID/idValue eq '001-0000001'</code>
200 OK (empty list)	When pagination reaches the end of the page Example <code>/hr/v2/worker-demographics?\$Skip=201&\$Top=100</code>
404 Not found	It would be returned if you call the API for a non-existing AOID for instance Example <code>/hr/v2/workers/<incorrect-aid></code>
403 Forbidden	When credentials do not have access to resource, e.g. trying access an associate that is not into caller's hierarchy.
406 Not acceptable	When the server cannot produce a response matching the list of acceptable values defined in the request resource Example <code>/hr/v2/workers/{aid}</code> Headers: Accept: image/png

Chapter 4

Use Case: Updating Worker Personal Communications

Application Scope

The following canonical needs to be added to your application scope to enable this use case:

`/hr/workerInformationManagement/workerManagement/communicationManagement/worker.personalCommunication.landline.change`

`/hr/workerInformationManagement/workerManagement/communicationManagement/worker.personalCommunication.landline.add`

`/hr/workerInformationManagement/workerManagement/communicationManagement/worker.personalCommunication.landline.remove`

`/hr/workerInformationManagement/workerManagement/communicationManagement/worker.personalCommunication.mobile.change`

`/hr/workerInformationManagement/workerManagement/communicationManagement/worker.personalCommunication.mobile.add`

`/hr/workerInformationManagement/workerManagement/communicationManagement/worker.personalCommunication.mobile.remove`

/hr/workerInformationManagement/workerManagement/communicationManagement/worker.personalCommunication.email.change

/hr/workerInformationManagement/workerManagement/communicationManagement/worker.personalCommunication.email.add

/hr/workerInformationManagement/workerManagement/communicationManagement/worker.personalCommunication.email.remove

API Usage

API Tables

The tables in the upcoming sections list the data you can update through APIs belonging to each section of ADP eXpert Brazil.

For eXpert Brazil, there's only one field for each information, which means that if you send a change or add call, if the worker already has an information registered, this information will be updated to the new value sent. The remove APIs are used to clear the information registered, what can be done sending the change API with the information as blank. So you could use only the Change operation to fully maintain the fields, without having to develop the three APIs if it would be best for your system.

The following describes how the tables are set-up:

- **ADP eXpert Brazil Field Name** – Lists the field where you can use the API to perform an insert, update, and/or delete operation using the POST method.
- **Operation** - Lists the operation provided for this URI.
- **Application Scope** – Lists the canonical ID.
- **API and Event Type** – Lists the URI for the request.
- **GitHub Sample Payloads** – Provides the location where the sample request and response payloads are posted.

ADP eXpert Brazil Field Name	Operation	Application Scope	API and Event Type	GitHub Sample Payloads - Request	GitHub Sample Payloads - Response
E-mail Opcional	Add	/hr/workerInformationManagement/workerManagement/communicationManagement/worker.personalCommunication.email.add	/events/hr/v1/worker.personal-communication.email.add	JSON Request Payload Example	JSON Response Payload Example
E-mail Opcional	Change	/hr/workerInformationManagement/workerManagement/communicationManagement/worker.personalCommunication.email.change	/events/hr/v1/worker.personal-communication.email.change	JSON Change Request Payload Example	JSON Change Response Payload Example
E-mail Opcional	Remove	/hr/workerInformationManagement/workerManagement/communicationManagement/worker.personalCommunication.email.remove	/events/hr/v1/worker.personal-communication.email.remove	JSON Remove Request Payload Example	JSON Remove Response Payload Example
Telefone Alternativo	Add	/hr/workerInformationManagement/workerManagement/communicationManagement/worker.personalCommunication.landline.add	/events/hr/v1/worker.personal-communication.landline.add	JSON Add Request Payload Example	JSON Add Response Payload Example
Telefone Alternativo	Change	/hr/workerInformationManagement/workerManagement/communicationManagement/worker.personalCommunication.landline.change	/events/hr/v1/worker.personal-communication.landline.change	JSON Change Request Payload Example	JSON Change Response Payload Example

ADP eXpert Brazil Field Name	Operation	Application Scope	API and Event Type	Git Hub Sample Payloads - Request	Git Hub Sample Payloads - Response
Telefone Alternativo	Remove	/hr/workerInformationManagement/workerManagement/communicationManagement/worker.personalCommunication.landline.remove	/events/hr/v1/worker.personal-communication.landline.remove	JSON Remove Request Payload Example	JSON Remove Response Payload Example
Telefone	Add	/hr/workerInformationManagement/workerManagement/communicationManagement/worker.personalCommunication.mobile.add	/events/hr/v1/worker.personal-communication.mobile.add	JSON Add Request Payload Example	JSON Add Response Payload Example
Telefone	Change	/hr/workerInformationManagement/workerManagement/communicationManagement/worker.personalCommunication.mobile.change	/events/hr/v1/worker.personal-communication.mobile.change	JSON Change Request Payload Example	JSON Change Response Payload Example
Telefone	Remove	/hr/workerInformationManagement/workerManagement/communicationManagement/worker.personalCommunication.mobile.remove	/events/hr/v1/worker.personal-communication.mobile.remove	JSON Remove Request Payload Example	JSON Remove Response Payload Example

Note

Check the appendixes section for details in the content of each field and validations applied.

Chapter 5

Use Case: Updating Worker Address

Application Scope

The following canonical needs to be added to your application scope to enable this use case:

`/hr/workerInformationManagement/workerManagement/addressManagement/worker.legalAddress.add`

`/hr/workerInformationManagement/workerManagement/addressManagement/worker.legalAddress.change`

API Usage

For eXpert Brazil, only one worker address can be registered at each given time, where this address is considered the legal and personal worker address. Because of that, when you send a Address Add call, the system will have the same behaviour as the Address Change API, where the worker's address will be updated to the new value sent. So you could use only the Change operation to fully maintain the fields, without having to develop the Add API if it would be best for your system.

Also, the address is a mandatory information in Brazil and because of that, the eXpert Brazil won't support the Address Remove APIs, as there's no possibility to keep this field as blank. When sending a new address, please keep in mind that due to the eSocial validation, for addresses in Brazil is mandatory that the postal code (CEP) is a valid code as registered in the Postal Service ("Correios") database, which means your system should have the postal codes list up to date to avoid rejections.

Method	URI	Description	GitHub Sample Payload	GitHub Sample Response Payload
POST	/events/hr/v1/worker.legal-address.add	Changes the address of a worker.	Worker Legal Address Add Request Example	Worker Legal Address Add Response Example
POST	/events/hr/v1/worker.legal-address.change	Changes the address of a worker.	Worker Legal Address Change Request Example	Worker Legal Address Change Response Example

Please check the appendix F for the details on fields and data validation for these APIs.

Chapter 6

Use Case: Updating GovernmentIDs

Application Scope

The following canonical needs to be added to your application scope to enable this use case:

/hr/workerInformationManagement/workerManagement/associateManagement/worker.governmentID.add

/hr/workerInformationManagement/workerManagement/associateManagement/worker.governmentID.change

/hr/workerInformationManagement/workerManagement/associateManagement/worker.governmentID.remove

API Usage

API Tables

The tables in the upcoming sections list the data you can update through APIs belonging to each section of ADP eXpert Brazil.

For eXpert Brazil, there's only one field for each information, which means that if you send a change or add call, if the worker already has an information registered, this information will be updated to the new value sent. The remove APIs are used to clear the information registered, what can be done sending the change API with the information as blank. So you could use only the Change operation to fully maintain the fields, without having to develop the three APIs if it would be best for your system.

Although you can change any of the worker's listed documents, only one document can be changed per call. If you are updating multiple documents, please send one call per document.

The following describes how the tables are set-up:

- **ADP eXpert Brazil Field Name** – Lists the field where you can use the API to perform an insert, update, and/or delete operation using the POST method.
- **Operation** - Lists the operation provided for this URI.
- **Application Scope** – Lists the canonical ID.
- **API and Event Type** – Lists the URI for the request.
- **GitHub Sample Payloads** – Provides the location where the sample request and response payloads are posted.

ADP eXpert Brazil Field Name	Operation	Application Scope	API and Event Type	Git Hub Sample Payloads - Request	Git Hub Sample Payloads - Response
CPF, RG, CTPS, RNE, PIS, Certificado de Reservista, Título de Eleitor, CNH, RIC, CNS	Add	/hr/workerInformationManagement/workerManagement/associateManagement/worker.governmentID.add	/events/hr/v1/worker.government-id.add	JSON Request Payload Example	JSON Response Payload Example
CPF, RG, CTPS, RNE, PIS, Certificado de Reservista, Título de Eleitor, CNH, RIC, CNS	Change	/hr/workerInformationManagement/workerManagement/associateManagement/worker.governmentID.change	/events/hr/v1/worker.government-id.change	JSON Change Request Payload Example	JSON Change Response Payload Example
CPF, RG, CTPS, RNE, PIS, Certificado de Reservista, Título de Eleitor, CNH, RIC, CNS	Remove	/hr/workerInformationManagement/workerManagement/associateManagement/worker.governmentID.remove	/events/hr/v1/worker.government-id.remove	JSON Remove Request Payload Example	JSON Remove Response Payload Example

Note

Check the appendixes section for details in the content of each field and validations applied.

Chapter 7

Use Case: Updating Worker Business Communications

Application Scope

The following canonical needs to be added to your application scope to enable this use case:

/hr/workerInformationManagement/workerManagement/communicationManagement/worker.businessCommunication.email.add

/hr/workerInformationManagement/workerManagement/communicationManagement/worker.businessCommunication.email.change

/hr/workerInformationManagement/workerManagement/communicationManagement/worker.businessCommunication.email.remove

/hr/workerInformationManagement/workerManagement/communicationManagement/worker.businessCommunication.mobile.add

/hr/workerInformationManagement/workerManagement/communicationManagement/worker.businessCommunication.mobile.change

/hr/workerInformationManagement/workerManagement/communicationManagement/worker.businessCommunication.mobile.remove

API Usage

API Tables

The tables in the upcoming sections list the data you can update through APIs belonging to each section of ADP eXpert Brazil.

For eXpert Brazil, there's only one field for each information, which means that if you send a change or add call, if the worker already has an information registered, this information will be updated to the new value sent. The remove APIs are used to clear the information registered, what can be done sending the change API with the information as blank. So you could use only the Change operation to fully maintain the fields, without having to develop the three APIs if it would be best for your system.

The following describes how the tables are set-up:

- **ADP eXpert Brazil Field Name** – Lists the field where you can use the API to perform an insert, update, and/or delete operation using the POST method.
- **Operation** - Lists the operation provided for this URI.
- **Application Scope** – Lists the canonical ID.
- **API and Event Type** – Lists the URI for the request.
- **GitHub Sample Payloads** – Provides the location where the sample request and response payloads are posted.

ADP eXpert Brazil Field Name	Operation	Application Scope	API and Event Type	GitHub Sample Payloads - Request	GitHub Sample Payloads - Response
E-mail	Add	/hr/workerInformationManagement/workerManagement/communicationManagement/worker.businessCommunication.email.add	/events/hr/v1/worker.business-communication.email.add	JSON Request Payload Example	JSON Response Payload Example
E-mail	Change	/hr/workerInformationManagement/workerManagement/communicationManagement/worker.businessCommunication.email.change	/events/hr/v1/worker.business-communication.email.change	JSON Change Request Payload Example	JSON Change Response Payload Example
E-mail	Remove	/hr/workerInformationManagement/workerManagement/communicationManagement/worker.businessCommunication.email.remove	/events/hr/v1/worker.business-communication.email.remove	JSON Remove Request Payload Example	JSON Remove Response Payload Example
Telefone Comercial	Add	/hr/workerInformationManagement/workerManagement/communicationManagement/worker.businessCommunication.mobile.add	/events/hr/v1/worker.business-communication.mobile.add	TBD	TBD
Telefone Comercial	Change	/hr/workerInformationManagement/workerManagement/communicationManagement/worker.businessCommunication.mobile.change	/events/hr/v1/worker.business-communication.mobile.change	TBD	TBD
Telefone Comercial	Remove	/hr/workerInformationManagement/workerManagement/communicationManagement/worker.businessCommunication.mobile.remove	/events/hr/v1/worker.business-communication.mobile.remove	TBD	TBD

Note

Check the appendixes section for details in the content of each field and validations applied.

Chapter 8

Use Case: Retrieving Updates in Worker Personal Communications

Application Scope

The following canonical needs to be added to your application scope to enable this use case:

/hr/workerInformationManagement/workerManagement/addressManagement/worker.legalAddress.change.read

/hr/workerInformationManagement/workerManagement/communicationManagement/worker.personalCommunication.email.change.read

/hr/workerInformationManagement/workerManagement/communicationManagement/worker.personalCommunication.landline.change.read

/hr/workerInformationManagement/workerManagement/communicationManagement/worker.personalCommunication.mobile.change.read

API Usage

These APIs follow the Event Notifications flow, where your application can retrieve the events from a queue and request the details of each Event through the respective API described in this documentation.

For more details about the Event Notifications flow, please check the following documentation: [Event Notifications](#)

Every call done to these APIs must have the event ID of the event being requested, we don't provide the option to retrieve multiple events at once. Please be aware that when you request the event, we'll still apply the Data Entitlements control, so if you request the details of an event that belongs to a worker you don't have access to, you will receive an error message explaining that.

API Tables

The table in the following section demonstrates which personal communications fields from the eXpert system you can retrieve notifications to update your system with

For eXpert Brazil, there's only one field for each information, so we'll only have the change event for each field(s) with the correspondent update. If the user makes multiple changes in a very short window, we consolidate those changes to optimize the update flow.

The following describes how the tables are set-up:

- **ADP eXpert Brazil Field Name** – Lists the field where you can use the API to perform an insert, update, and/or delete operation using the POST method.
- **Application Scope** – Lists the canonical ID.
- **API and Event Type** – Lists the URI for the request.
- **GitHub Sample Payload** – Provides the location where the sample response payload is posted.

ADP eXpert Brazil Field Name	Application Scope	API and Event Type	GitHub Sample Payloads - Response
E-mail Opcional	/hr/workerInformationManagement/workerManagement/communicationManagement/worker.personalCommunication.email.change.read	/events/hr/v1/worker.personal-communication.email.change/{event-id}	JSON Change Response Payload Example
Telefone Alternativo	/hr/workerInformationManagement/workerManagement/communicationManagement/worker.personalCommunication.landline.change.read	/events/hr/v1/worker.personal-communication.landline.change/{event-id}	JSON Change Response Payload Example
Telefone	/hr/workerInformationManagement/workerManagement/communicationManagement/worker.personalCommunication.mobile.change.read	/events/hr/v1/worker.personal-communication.mobile.change/{event-id}	JSON Change Response Payload Example
Endereço	/hr/workerInformationManagement/workerManagement/addressManagement/worker.legalAddress.change.read	/events/hr/v1/worker.legal-address.change/{event-id}	JSON Change Response Payload Example

Note

The available fields may change depending on your user configuration and ADP system particularities. Check the appendices section for more details on the fields available.

Use Case: Retrieving Updates in Worker Government IDs

Application Scope

The following canonical needs to be added to your application scope to enable this use case:

`/hr/workerInformationManagement/workerManagement/associateManagement/worker.governmentID.change.read`

API Usage

These APIs follow the Event Notifications flow, where your application can retrieve the events from a queue and request the details of each Event through the respective API described in this documentation.

For more details about the Event Notifications flow, please check the following documentation: [Event Notifications](#)

Every call done to these APIs must have the event ID of the event being requested, we don't provide the option to retrieve multiple events at once. Please be aware that when you request the event, we'll still apply the Data Entitlements control, so if you request the details of an event that belongs to a worker you don't have access to, you will receive an error message explaining that.

API Tables

The table in the following section demonstrates which fields from the eXpert system you can retrieve notifications to update your system with. If the user makes multiple changes in a very short window, we consolidate those changes to optimize the update flow.

The following describes how the tables are set-up:

- **ADP eXpert Brazil Field** – Lists the field that will be notified by this kind of event.
- **Application Scope** – Lists the canonical ID.
- **API and Event Type** – Lists the URI for the request.
- **GitHub Sample Payload** – Provides the location where the sample response payload is posted.

ADP eXpert Brazil Process	Application Scope	API and Event Type	GitHub Sample Payloads - Response
Documentos do colaborador	<code>/hr/workerInformationManagement/workerManagement/associateManagement/worker.governmentID.change.read</code>	<code>/events/hr/v1/worker.government-id.change/{event-id}</code>	JSON Change Response Payload Example

In the government IDs for eXpert we have the following IDs:

- CPF (Tax ID)
- RG (Identity document)
- CNH (Driver's license)
- PIS/PASEP (Person ID in the government worker social system)
- CTPS (Worker registration number in the Work Ministry)
- CNS (Person registration number in the Health Ministry)
- Título de Eleitor (Voter's registration number)
- RNE (Identity document for foreign nationals)
- Military discharge registration number
- eSocial worker number

Note

The available fields may change depending on your user configuration and ADP system particularities. Check the appendices section for more details on the fields available.

Chapter 10

Use Case: Updating a worker alternate ID

Application Scope

The following canonical needs to be added to your application scope to enable this use case:

`/hr/workerInformationManagement/workerManagement/associateManagement/worker.alternateID.change`

API Usage

The table in the upcoming section list the data you can update through APIs belonging to each section of ADP eXpert Brazil.

Only one worker can be updated and only one new value to the worker's alternate ID can be informed at each call. Before using this API, make sure the alternate ID configuration in eXpert allows updates in your case, as many clients don't allow change in this ID once it is setup for the worker.

The following describes how the tables are set-up:

- **ADP eXpert Brazil Field Name** – Lists the field where you can use the API to perform an insert, update, and/or delete operation using the POST method.
- **Operation** - Lists the operation provided for this URI.
- **Application Scope** – Lists the canonical ID.
- **API and Event Type** – Lists the URI for the request.
- **GitHub Sample Payloads** – Provides the location where the sample request and response payloads are posted.

ADP eXpert Brazil Field Name	Operation	Application Scope	API and Event Type	GitHub Sample Payloads - Request	GitHub Sample Payloads - Response
ID Global	Change	<code>/hr/workerInformationManagement/workerManagement/associateManagement/worker.alternateID.change</code>	<code>/events/hr/v1/worker.alternate-id.change</code>	TBD	TBD

Note

Check the appendixes section for details in the content of each field and validations applied.

Chapter 11

Appendices

Appendix A: Workers/Worker Demographics GET Data Dictionary

The data dictionary provides the schema resource to application user interface field mapping.

Workers > associateOID

Canonical Field	Label	SOR Rule for Regular Workers	SOR Rule for Regular Workers (in local language)
/workers/associateOID	ADP SOR identifier	Person's code in eXpert system. To assure unicity, the rule will be: <"client code">-<"person code"> Example: 1X000001234 If the worker has more than one contract with the company, this ID will be the same accross contracts.	Código da pessoa no sistema eXpert. Para garantir unicidade, seguirá a regra: <"código do cliente">X<"código da pessoa"> Exemplo: 1X000001234 Se o empregado tiver mais de um contrato (multi-contrato ou readmissão), este campo terá a mesma informação para todos os contratos.

Workers > workerID

Canonical Field	Label	SOR Rule for Regular Workers	SOR Rule for Regular Workers (in local language)
/workers/workerID /workers/workerID/idValue	Worker employee number	Worker's code in eXpert system. To assure unicity, the rule will be: <"company code">-<"worker "Matrícula"> Example: 001-000005678 If the worker has more than one contract with the company, this ID will be the different accross contracts.	Código de empregado no sistema eXpert. Para garantir unicidade, seguirá a regra: <"Código da empresa">-<"Matrícula"> Exemplo: 001-000005678 Se o empregado tiver mais de um contrato (multi-contrato ou readmissão), este campo será diferente para cada contrato.

Workers > alternatelDs (in this array there will be one element for each alternate ID the worker has)

Canonical Field	Label	SOR Rule for Regular Workers	SOR Rule for Regular Workers (in local language)
/workers/alternatelDs /workers/alternatelDs/idValue	Worker's Alternate ID	Worker's Alternate ID In this section there will be two fields: Global ID Employee ID	IDs alternativos para a pessoa/empregado utilizados no eXpert. Nesta seção teremos os dados de: ID Global Matrícula
/workers/alternatelDs/schemeCode /workers/alternatelDs/schemeCode /shortName	Worker's Alternate ID type	Worker's Alternate ID type	Tipo do ID sendo mostrado.

Workers > person

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
<code>/workers/person/governmentIDs</code> <code>/workers/person/governmentIDs/idValue</code>	Government issued document number.	This session will show the workers documents, one array element for each document. Will be reported the following documents: RG, RNE, CPF, CTPS, PIS, Military Reserver Certificate, Driver's licence, RIC, OC, eSocial ID and CNS.	Nesta sessão serão demonstrados os documentos do colaborador. Para cada tipo de documento será reportado um elemento no <i>array</i> de documentos. Serão reportados os dados de RG, RNE, CPF, CTPS, PIS, Certificado de Reservista, Título de Eleitor, CNH, RIC, OC, Matrícula eSocial e CNS
<code>/workers/person/governmentIDs/nameCode/codeValue</code> <code>/workers/person/governmentIDs/nameCode/shortName</code>	Government issued document name and category (when applicable)	Name of the reported document in the element. The code field will be used to inform the other fields for each document, when applicable: Driver's licence: Category, Issuing Body and Issuing State RG: Issuing body and state. Voter's registration: zone, section and voting city. RNE, RIC and OC: issuing body CTPS: serie number and state.	Nome do documento sendo reportado neste item do <i>array</i> . O campo de código será utilizado para as informações complementares dos documentos: Driver's licence: categoria, órgão emissor e UF de emissão. RG: órgão e estado de emissão. Voter's registration: zona, seção e código do município de votação. RNE, RIC and OC: órgão emissor CTPS: série e UF.
<code>/workers/person/governmentIDs/statusCode</code> <code>/workers/person/governmentIDs/statusCode/effectiveDate</code>	Government issued document issue date.	Document issue date if this information is stored in eXpert.	Data de expedição para documentos que tem essa informação no sistema, em branco para as que não tem.
<code>/workers/person/governmentIDs/expirationDate</code>	Government issued document expiration date (when applicable)	Document expiration date if this information is stored in eXpert (only driver's licence and OC).	Data de expedição para documentos que tem essa informação no sistema (CNH e OC), em branco para as que não tem.
<code>/workers/person/legalName</code> <code>/workers/person/legalName/givenName</code> <code>/workers/person/legalName/middleName</code> <code>/workers/person/legalName/familyName1</code> <code>/workers/person/legalName/formattedName</code> <code>/workers/person/legalName/nickName</code>	The current legal name and nickname of the person in the associated context.	Worker's full name and nickname.	Nome completo do colaborador e apelido (se informado).
<code>/workers/person/birthDate</code>	Date of Birth	Worker's date of birth.	Data de nascimento do colaborador

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/workers/person/legalAddresses/buildingNumber /workers/person/legalAddresses/lineOne /workers/person/legalAddresses/lineTwo /workers/person/legalAddresses/lineThree /workers/person/legalAddresses/cityName /workers/person/legalAddresses/countrySubdivisionLevel1/codeValue /workers/person/legalAddresses/countrySubdivisionLevel1/shortName /workers/person/legalAddress/countrySubdivisionLevel1/subdivisionType /workers/person/legalAddresses/countryCode /workers/person/legalAddresses/postalCode /workers/person/legalAddresses/blockName /workers/person/legalAddresses/streetName /workers/person/legalAddress/streetTypeCode /workers/person/legalAddress/streetTypeCode/shortName /workers/person/legalAddress/unit	This is the primary residential address that is used by an organization.	Worker's address with the following rule: LineOne: street type, street name and address complement. LineTwo: Neighbourhood name, city name and state code. LineThree: postal code City Name: city name Country Subdivision: state code and name Country Code: country code in the ISO-3166 table. Postal code: address postal code Block name: neighbourhood name Street Type: street type identification Unit: address complement	Endereço do colaborador, com a seguinte divisão: LineOne: Tipo, Logradouro e Complemento de endereço LineTwo: Bairro, Município e Estado. LineThree: CEP City Name: nome do município Country Subdivision: Estado Country Code: Código do país conforme ISO-3166 Postal Code: CEP Block Name: Bairro Street Name: logradouro Street Type: Tipo de Logradouro Unit: complemento do endereço

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/workers/person/communication/landlines/formattedNumber /workers/person/communication/landlines/areaDialing /workers/person/communication/landlines/dialNumber /workers/person/communication/landlines/itemID	Personal communication of an employee - Landline	Worker's alternative telephone number	Número do telefone alternativo do colaborador.
/workers/person/communication/mobiles/formattedNumber /workers/person/communication/mobiles/areaDialing /workers/person/communication/mobiles/dialNumber /workers/person/communication/mobiles/itemID	Personal communication of an employee - Mobiles	Worker's telephone number	Número do telefone do colaborador.
/workers/person/communication/emails/emailUri /workers/person/communication/emails/itemID	Personal communication of an employee - Emails	Worker's alternative/optional e-mail address.	E-mail alternativo (opcional) do colaborador.
/workers/person/communication/faxes /workers/person/communication/faxes/areaDialing /workers/person/communication/faxes/dialNumber /workers/person/communication/faxes/formattedNumber /workers/person/communication/faxes/itemID	Personal communication of an employee - Faxes	Worker's fax number	Número do fax do colaborador.

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/workers/person/genderCode/codeValue /workers/person/genderCode/shortValue	The gender of a person, e.g. Male, Female	Worker's gender	Sexo do colaborador
/workers/person/maritalStatusCode/codeValue /workers/person/maritalStatusCode/shortName	Marital Status	Worker's marital status code and name	Código e nome do estado civil do colaborador.
/workers/person/disabledIndicator	Worker's disability indicator	Indicates if the worker is PCD or not.	Indica se o colaborador é PCD ou não.
/workers/person/disabilityTypeCodes /workers/person/disabilityTypeCodes/shortName /workers/person/disabilityTypeCodes/longName	Worker's disability types	Worker's disability types (code and name). If more than one type is registered, there will be one element in the array for each type. The long name would be the description of the disability if informed.	Tipo de deficiência do colaborador (código e nome). Se mais de um tipo estiver cadastrado, será mostrado um elemento para cada tipo cadastrado. O campo <i>long name</i> será utilizado para demonstrar a descrição da deficiência, se informado.
/workers/person/studentIndicator	Worker's student indicator	Indicates if the worker is student or not.	Indica se o colaborador é estudante ou não.
/workers/person/immigrationDocuments /workers/person/immigrationDocuments/documentID	Worker's immigration document ID if applicable.	Worker's naturalization process number.	Número da portaria de naturalização do colaborador.
/workers/person/immigrationDocuments/typeCode /workers/person/immigrationDocuments/typeCode/codeValue /workers/person/immigrationDocuments/typeCode/shortName	Worker's immigration document type	Worker's immigration document type: P (Permanent) or T (Temporary)	Tipo do visto do colaborador: P (Permanente) ou T (Temporário)
/workers/person/immigrationCondition	Worker's foreign worker condition.	Worker's foreign worker condition code	Código e nome da condição de estrangeiro

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
tionDocuments/itemID		and name	do colaborador.
/workers/person/preferredName /workers/person/preferredName/givenName /workers/person/preferredName/middleName /workers/person/preferredName/familyName1 /workers/person/preferredName/formattedName	Worker's preferred name	Worker's social name	Nome social do colaborador.
/workers/person/birthPlace/cityName /workers/person/birthPlace/countrySubdivisionLevel1/codeValue /workers/person/birthPlace/countrySubdivisionLevel1/shortName /workers/person/birthPlace/countrySubdivisionLevel1/subdivisionType /workers/person/birthPlace/countryCode /workers/person/birthPlace/formattedBirthPlace	Place of Birth	Worker's place of birth	Naturalidade do colaborador.
/workers/person/raceCode/codeValue /workers/person/raceCode/shortName	Race is a classification system used to categorize humans into large and distinct populations or groups by heritable phenotypic characteristics, geographic ancestry, culture, history, language, physical appearance, ethnicity, and social status	Worker's race code and name	Raça/cor do colaborador (código e nome)
/workers/person/citizenshipCountryCodes/codeValue	Worker's nationality	Worker's nationality. In case of foreign naturalized workers, there will be two elements in the array.	Nacionalidade do colaborador. No caso de colaboradores estrangeiros naturalizados, serão demonstrados dois elementos, um

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/workers/person/citizenshipCountryCodes/shortName			para o país de naturalidade e outro para Brasil.
/workers/person/highestEducationLevelCode /workers/person/highestEducationLevelCode/codeValue /workers/person/highestEducationLevelCode/shortName	Worker's highest level of education	Worker's highest level of education code and name	Código e nome do grau de escolaridade do colaborador
/workers/person/customFieldGroup /workers/person/customFieldGroup/stringFields /workers/person/customFieldGroup/stringFields/nameCode /workers/person/customFieldGroup/stringFields/nameCode/shortName /workers/person/customFieldGroup/stringFields/stringValue	Worker's personal information specific for Brazil	Worker's mother name and father name.	Neste scampos teremos duas informações no formato de <i>array</i> . Nome da Mãe do colaborador Nome do Pai do colaborador
/workers/person/customFieldGroup/indicatorFields /workers/person/customFieldGroup/indicatorFields/itemID /workers/person/customFieldGroup/indicatorFields/indicatorValue	Worker's information specific for Brazil	In this array, we'll have fields for the following indicators: Pregnant indicator: indicates if the worker is pregnant. Breastfeeding indicator: indicates if the worker is currently breastfeeding. Rehire: indicates if the worker was reintegrated to the position. In the itemID field we'll have the name of the type of information in the object and in the indicatorValue the value for that type for the worker.	Nesta lista teremos os seguintes indicadores: "Pregnant": indica se a colaboradora é gestante. "Breastfeeding": indica se a colaboradora está amamentando no momento. "Rehire": indica se o colaborador teve uma reintegração. No campo de itemID teremos o tipo de informação de cada objeto e no campo indicatorValue teremos o valor do indicador.
/workers/person/customFieldGroup/numberFields	Worker's information specific for Brazil	In this array, we'll have fields for the following data: "Date Rehire": effective date of the reintegration	Nesta lista teremos os seguintes indicadores: "Date Rehire": data da reintegração

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/workers/person/customFieldGroup/numberFields/itemID /workers/person/customFieldGroup/numberFields/indicatorValue		"Reason Rehire": reintegration reason code "Court Rehire": court decision number if the reintegration was based on court ruling. This three fields only will be reported if the worker was reintegrated. In the itemID field we'll have the name of the value of the information in the object and in the nameCode/shortName we'll have the type of information.	"Reason Rehire": código do motivo de reintegração "Court Rehire": código do processo de reintegração, se aplicável. Estes três campos serão demonstrados somente para colaboradores que tiverem uma reintegração. No campo de itemID teremos o valor da informação de cada objeto e no campo nameCode/shortName o tipo de informação

Workers > workerDates

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/workers/workerDates /workers/workerDates/originalHireDate	Worker's original hire date	Worker's original hire date	Data de admissão do colaborador
/workers/workerDates/adjustedServiceDate	Worker's adjusted service date	Worker's adjusted service date	Data para ATS do colaborador
/workers/workerDates/acquisitionDate	Worker's acquisition date	Worker's start date in the current company if transferred from another company.	Data de entrada do colaborador por cessão na empresa.
/workers/workerDates/terminationDate	Worker's termination date	Worker's termination date	Data de desligamento do colaborador
/workers/workerDates/expectedTerminationDate	Worker's expected termination date	Worker's expected termination date if fixed term contract.	Data de término de contrato, se empregado contratado por tempo determinado.
/workers/workerDates/leaveOfAbsenceReturnDate	Worker's leave of absence expected return date	Worker's leave of absence expected return date	Data de retorno do colaborador de afastamento, se colaborador afastado.

Workers > workerStatus

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/workers/workerStatus/statusCode /workers/workerStatus/statusCode/codeValue /workers/workerStatus/statusCode/shortName	Worker's status	Worker's status "Active" for active employees "Inactive" for terminated workers.	Estado do colaborador: "Active" para colaboradores ativos. "Inactive" para colaboradores desligados.

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
me			
/workers/workerStatus/statusCode/longName	Worker's detailed status	Worker's detailed status "Active" for active employees not on leave "active - on leave - " for active workers on leave "Inactive - <"Termination Reason">" for terminated workers.	Estado detalhado do colaborador: "Active" para colaboradores ativos não afastados. "active - on leave - <"Tipo de Afastamento">" para colaboradores afastados "Inactive - <"motivo de desligamento">" para colaboradores desligados.
/workers/workerStatus/effectiveDate	Worker's status effective date	If the employee is terminated, show the termination date. If the employee is on leave, show the leave start date. If the employee is active, show the date of return from the last leave or the hire date, which is newest.	Se empregado está desligado, trazer a data de desligamento. Se empregado está afastado, trazer a data de afastamento. Se o empregado está ativo, trazer a data de retorno do último afastamento ou a data de admissão, o que for mais recente.

Workers > businessCommunication

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/workers/businessCommunication/emails[]/emailUri /workers/businessCommunication/emails[]/itemID	Worker's business e-mail	Worker's e-mail	E-mail do colaborador

Workers > workAssignments

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/workers/workAssignments/workAgreementRef /workers/workAssignments/workAgreementRef/workAgreementID	Worker's work agreement ID in the government	Worker's MTB Number	Número do registro no MTB do colaborador
/workers/workAssignments/workAgreementRef/workAgreementType /workers/workAssignments/workAgreementRef/workAgreementType/codeValue /workers/workAssignments/workAgreementRef/workAgreementType/shortName	Indicates if it is the employee's first job	Indicates if it is the employee's first job Posibles values: Y e N	Indicativo de primeiro emprego do colaborador Valores possíveis: Y (First Job) e N (Not first job)

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/workers/workAssignments/workAgreementRef/workAgreementOrganizationalUnits/governmentRegistrations /workers/workAssignments/workAgreementRef/workAgreementOrganizationalUnits/governmentRegistrations/registrationID	Worker's Company's government registration ID (first 8 digits of the CNPJ number)	Worker's Company's government registration ID (first 8 digits of the CNPJ number)	CNPJ raiz da empresa do colaborador.
/workers/workAssignments/primaryIndicator	Indicates if it is the worker's primary employee record	Indicates if it is the worker's primary employee record To workers with just one contract, always show Y.	Indica a ficha principal para colaboradores multi-contrato. Para colaboradores com apenas um contrato, será demonstrado sempre Y
/workers/workAssignments/hireReasonCode /workers/workAssignments/hireReasonCode/codeValue /workers/workAssignments/hireReasonCode/shortName	Hire Reason Code	Reason for hiring the temporary worker. Fields applicable only to workers with eSocial category 106, RAIS 50. Options: 1 - Temporary replacement of workforce 2 - Increase of extraordinary services	Motivo da contratação do trabalhador temporário. Campos aplicável somente para colaboradores de categoria eSocial 106, vínculo RAIS 50. Opções: 1 para Necessidade de substituição transitória de pessoal permanente 2 para Demanda complementar de serviços
/workers/workAssignments/hiringJustificationNote /workers/workAssignments/hiringJustificationNote/shortName /workers/workAssignments/hiringJustificationNote/longName	Hiring Justification Note	Justification for hiring the temporary worker. Fields applicable only to workers with eSocial category 106, RAIS 50.	Justificativa da contratação do trabalhador temporário. Campos aplicável somente para colaboradores de categoria eSocial 106, vínculo RAIS 50.
/workers/workAssignments/hiringObjectiveCode /workers/workAssignments/hiringObjectiveCode/codeValue /workers/workAssignments/hiringObjectiveCode/shortName	Hiring Objective	Hiring objective of the temporary worker. Fields applicable only to workers with eSocial category 106, RAIS 50. Options: 1 - Location without branch 2 - Market study 3 - Hiring for more than 3 months	Tipo de inclusão da contratação do trabalhador temporário. Campo aplicável somente para colaboradores de categoria eSocial 106, vínculo RAIS 50. Opções: 1 para Locais sem Filiais 2 para Estudo de Mercado 3 para Contratação superior a 3 meses
/workers/workAssignments/replacedWorkerGovernmentID /workers/workAssignments/re	Replaced Worker GovernmentID	Tax ID of the replaced worker. Fields applicable only to workers with eSocial category 106, RAIS 50.	CPF do trabalhador substituído pelo trabalhador temporário. Campo aplicável somente para colaboradores de categoria eSocial

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
placedWorkerGovernmentID/id Value /workers/workAssignments/re placedWorkerGovernmentID/n ameCode /workers/workAssignments/re placedWorkerGovernmentID/n ameCode/shortName			106, vínculo RAIS 50.
/workers/workAssignments/actualStart Date	Work Assignment Effective Start Date	Start date of the current work assignment. This date will be the most recent between the following start dates: Job Home Organizational Unit Salary Work Schedule Worker Type Hire Date	Data de início do histórico atual do colaborador. Esta data será a mais recente entre as seguintes datas: Início de vigência do histórico atual de: Função Lotação Salário Horário Vínculo Data de admissão
/workers/workAssignments/w orkerProbationPeriod /workers/workAssignments/w orkerProbationPeriod/startDat e /workers/workAssignments/w orkerProbationPeriod/endDate	Worker's probation period	Worker's probation period This period starts in the worker hire date and goes until the end of the experience or renovation periods if applicable.	Período de experiência do colaborador. Este período começa na data de admissão e vai até o final do período de experiência ou renovação da experiência, se aplicável.
/workers/workAssignments/w orkerTypeCode /workers/workAssignments/w orkerTypeCode/codeValue /workers/workAssignments/w orkerTypeCode/shortName	Worker's type	Worker's type code and name.	Código e nome do vínculo empregatício do colaborador (Trabalhador CLT, Estagiário, Menor Aprendiz, etc)
/workers/workAssignments/as signmentTermCode /workers/workAssignments/as signmentTermCode/codeValue /workers/workAssignments/as signmentTermCode/shortName	Worker assignment term code	Code and name of the type contract term. Possible values: 0 - Indetermined 1 - Fixed term - in days 2 - Fixed term - in occurrence of a fact	Código e nome do tipo de prazo de contrato. Valores possíveis: 0 - Indetermined para contrato indeterminado. 1 - "Fixed term - in days" para contrato determinado por dias. 2 - "Fixed term - in occurrence of a fact" para contrato determinado por ocorrência de um fato.
/workers/workAssignments/w orkLevelCode	Worker's level (e.g. Full Time, Part Time)	Indicates if the worker works full or part time.	Indica se o colaborador é trabalha em regime de tempo parcial.

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/workers/workAssignments/workLevelCode/codeValue /workers/workAssignments/workLevelCode/shortName		Possible values: P (Part-Time) or F (Full-Time)	Valores possíveis: P (Part-Time) ou F (Full-time).
/workers/workAssignments/nationalityContextCode /workers/workAssignments/nationalityContextCode/shortName	Worker's foreign worker condition (e.g. Inpatriate, Expatriate, Domestic)	"Inpatriate" if the worker has a valid temporary displacement certificate. "Expatriate": if the worker has a valid period of work in a foreign country. "Domestic": to other employees.	"Inpatriate": se o empregado tiver um certificado de deslocamento temporário vigente. "Expatriate": se o empregado tiver um período de trabalho no exterior vigente (rendpgext) "Domestic" para os demais casos
/workers/workAssignments/executiveIndicator	Worker's executive indicator.	Indicates if the worker is the highest level of the hierarchy.	Indica se o colaborador está no último nível da hierarquia.
/workers/workAssignments/legalEntityID	Worker's company name	Worker's company name	Nome da empresa do colaborador.
/workers/workAssignments/highlyCompensatedIndicator	Worker's highly compensated indicator.	Indicates if the worker is classified as "hipersufficient".	Indica se o colaborador é hipersuficiente.
/workers/workAssignments/workerGroups /workers/workAssignments/workerGroups/nameCode /workers/workAssignments/workerGroups/nameCode/shortName /workers/workAssignments/workerGroups/groupCode /workers/workAssignments/workerGroups/groupCode/codeValue	Worker's groups	Worker's groups, where there will be one element for each group: Sefip event: worker SEFIP event code and name. Hire Type: code and name of the worker's hire type Hire Indicator: code and name of the worker's hire indicator Type of activity: code and name of the worker's type of activity (Urban or Rural) TLM Type: code and name of the worker's TLM control type. (worker without TLM control, worker doesn't use clock punch control, worker use control punch control, TLM by exception).	Classificações do colaborador, onde será aberto um item para cada grupo: Sefip event: código e nome da ocorrência SEFIP do colaborador (Nunca exposto a agente nocivo, aposentadoria especial de 25 anos, etc) Hire Type: código e nome da opção de tipo de admissão do colaborador (Normal, Transferência do Mesmo Grupo, etc) Hire Indicator: código e nome da opção do indicativo de admissão do colaborador (Normal, Decorrente de Ação Judicial, etc) Type of activity: código e nome do tipo de atividade do colaborador (Urbano ou Rural) TLM Type: código e nome do tipo de modo ponto do colaborador (Bate ponto, Não bate ponto, Não utiliza efetividade, Ponto por exceção).
/workers/workAssignments/jobCode /workers/workAssignments/jobCode/codeValue	Worker's job code	Worker's job code, short name and start date. The job code is created combining the code of "Função" and "Cargo".	Código, abreviatura do nome da função e data de início de vigência do cargo/função do colaborador conforme histórico atual. O código será composto do código do cargo e o código da função, separando

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/workers/workAssignments/jobCode/shortName /workers/workAssignments/jobCode/effectiveDate			por traço.
/workers/workAssignments/jobTitle	Worker's job title	Worker's job title	Nome da função atual do colaborador
/workers/workAssignments/jobFamilyCode /workers/workAssignments/jobFamilyCode/codeValue /workers/workAssignments/jobFamilyCode/shortName	Worker's job family	Worker's job family code and name	Código e nome do cargo do colaborador conforme histórico vigente.
/workers/workAssignments/laborUnion /workers/workAssignments/laborUnion/laborUnionCode /workers/workAssignments/laborUnion/laborUnionCode/codeValue /workers/workAssignments/laborUnion/laborUnionCode/shortName	Worker's labor union	Worker's labor union code and name	Código e nome da categoria sindical do colaborador
/workers/workAssignments/bargainingUnit /workers/workAssignments/bargainingUnit/bargainingUnitCode /workers/workAssignments/bargainingUnit/bargainingUnitCode/codeValue /workers/workAssignments/bargainingUnit/bargainingUnitCode/shortName	Worker's bargaining unit	Worker's bargaining unit code and name	Código e nome do sindicato do colaborador.
/workers/workAssignments/workShiftCode /workers/workAssignments/workShiftCode/codeValue	Worker's work shift code	Worker's work shift code	Código da escala/turma do colaborador. O código será composto do código da escala e o código da turma, separando por traço.
/workers/workAssignments/workShiftCode/shortName	Worker's work shift name	Worker's work shift name	Nome da turma do colaborador

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/workers/workAssignments/workArrangementCode /workers/workAssignments/workArrangementCode/codeValue /workers/workAssignments/workArrangementCode/shortName	Worker's work Arrangement	Worker's work Arrangement	Código e nome do tipo de regime do colaborador
/workers/workAssignments/standardHours /workers/workAssignments/standardHours/hoursQuantity /workers/workAssignments/standardHours/unitCode /workers/workAssignments/standardHours/unitCode/shortName	Worker's standard monthly hours	Worker's standard monthly hours	Quantidade de horas mensais da escala atual do colaborador conforme histórico
/workers/workAssignments/homeOrganizationalUnits /workers/workAssignments/homeOrganizationalUnits/nameCode /workers/workAssignments/homeOrganizationalUnits/nameCode/codeValue /workers/workAssignments/homeOrganizationalUnits/nameCode/shortName	Worker's home organizational unit	Worker's home organizational unit (result center, following the unit ID rule)	Código e nome do centro de resultado do colaborador, seguindo a regra: D_<"Código da Empresa">_<"Código do Estabelecimento">_<"Código do centro de resultado"> --> Exemplo: D_001_001_123456789
/workers/workAssignments/assignedOrganizationalUnits /workers/workAssignments/assignedOrganizationalUnits/nameCode /workers/workAssignments/assignedOrganizationalUnits/nameCode/shortName	Worker's assigned organizational unit	If the worker is allocated in a company's client ("tomador"), show the client's code following the unit ID rule. If the worker is simultanelly allocated in more than one company's client, one element will be shown for each one. If the worker isn't allocated, show the home organizational unit.	Se o empregado está alocado em tomador/tomador obra própria, trazer o código/nome do tomador, seguindo a regra para código: Se Tomador: T_<"Código do Fornecedor"> --> Exemplo: T_1 Se Tomador Obra Própria: O_<"Código do Fornecedor"> --> Exemplo: O_10 Se o empregado estiver alocado em mais de um tomador, será enviado um registro neste bloco para cada tomador vigente. Caso contrário, trazer o código do centro de resultado do colaborador, seguindo a regra: D_<"Código da Empresa">_<"Código do Estabelecimento">_<"Código do centro

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
			de resultado"> --> Exemplo: D_001_001_123456789
/workers/workAssignments/homeWorkLocation /workers/workAssignments/homeWorkLocation/nameCode /workers/workAssignments/homeWorkLocation/nameCode/codeValue /workers/workAssignments/homeWorkLocation/nameCode/shortName	Worker's home work location	Name and code of the worker's branch, following the location ID rule.	Código/nome do estabelecimento atual do colaborador conforme histórico, seguindo a regra abaixo para o código: - Exemplo: Estabelecimento 1 Empresa 001--> código: ESTAB-001-1
/workers/workAssignments/homeWorkLocation/address /workers/workAssignments/homeWorkLocation/address/lineOne /workers/workAssignments/homeWorkLocation/address/lineTwo /workers/workAssignments/homeWorkLocation/address/lineThree /workers/workAssignments/homeWorkLocation/address/cityName /workers/workAssignments/homeWorkLocation/address/countrySubdivisionLevel1 /workers/workAssignments/homeWorkLocation/address/countrySubdivisionLevel1/codeValue /workers/workAssignments/homeWorkLocation/address/countrySubdivisionLevel1/shortName /workers/workAssignments/homeWorkLocation/address/countrySubdivisionLevel1/subdivisionType /workers/workAssignments/homeWorkLocation/address/countryCode /workers/workAssignments/homeWorkLocation/address/postalCode	Worker's home work location address	Worker's branch address with the following rule: LineOne: street type, street name and address complement. LineTwo: Neighbourhood name, city name and state code. LineThree: postal code City Name: city name Country Subdivision: state code and name Country Code: country code in the ISO-3166 table. Postal code: address postal code Block name: neighbourhood name Street Type: street type identification Unit: address complement	Endereço do estabelecimento do colaborador com a seguinte divisão: LineOne: Tipo, Logradouro e Complemento de endereço LineTwo: Bairro, Município e Estado. LineThree: CEP City Name: nome do município Country Subdivision: Estado Country Code: Código do país Postal Code: CEP Block Name: Bairro Street Name: logradouro Street Type: Tipo de Logradouro Unit: complemento do endereço

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/workers/workAssignments/as signedWorkLocations /workers/workAssignments/as signedWorkLocations/nameCode /workers/workAssignments/as signedWorkLocations/nameCode/shortName	Worker's assigned work location	If the worker is allocated in a company's client ("tomador"), show the client's code following the location ID rule. If the worker is simultanely allocated in more than one company's client, one element will be shown for each one. If the worker isn't allocated, show the home location.	Se o empregado está alocado em tomador/tomador obra própria, trazer o código do tomador, seguindo a regra: Se Tomador/Obra Própria: TOMA <"Código do Fornecedor"> --> Exemplo: TOMA_1 Se o empregado estiver alocado em mais de um tomador, será enviado um registro neste bloco para cada tomador vigente. Caso contrário, trazer o código/nome do estabelecimento do colaborador conforme regra: ESTAB- Exemplo: Estabelecimento 1 Empresa 001--> código: ESTAB-001-1
/workers/workAssignments/as signedWorkLocations/address /workers/workAssignments/as signedWorkLocations/address/lineOne /workers/workAssignments/as signedWorkLocations/address/lineTwo /workers/workAssignments/as signedWorkLocations/address/lineThree /workers/workAssignments/as signedWorkLocations/address/cityName /workers/workAssignments/as signedWorkLocations/address/countrySubdivisionLevel1 /workers/workAssignments/as signedWorkLocations/address/countrySubdivisionLevel1/codeValue /workers/workAssignments/as signedWorkLocations/address/countrySubdivisionLevel1/shortName /workers/workAssignments/as signedWorkLocations/address/countrySubdivisionLevel1/subdivisionType /workers/workAssignments/as signedWorkLocations/address/countryCode /workers/workAssignments/as signedWorkLocations/address/postalCode	Worker's assigned work location address	If the worker is allocated in a company's client ("tomador"), show the client's address. If the worker is simultanely allocated in more than one company's client, one element will be shown for each one. If the worker isn't allocated, show the home location address.	Endereço dos tomadores ou estabelecimento do colaborador (conforme regra do campo acima) com a seguinte divisão: LineOne: Tipo, Logradouro e Complemento de endereço LineTwo: Bairro, Município e Estado. LineThree: CEP City Name: nome do município Country Subdivision: Estado Country Code: Código do país Postal Code: CEP Block Name: Bairro Street Name: logradouro Street Type: Tipo de Logradouro Unit: complemento do endereço

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/workers/workAssignments/remunerationBasisCode /workers/workAssignments/remunerationBasisCode/codeValue /workers/workAssignments/remunerationBasisCode/shortName	Worker's remuneration basis	Worker's salary type. H - Hourly M - Monthly C - Commission T - Task	Código e nome do tipo salarial do colaborador H - Hourly: Horista M - Monthly: Mensalista C - Commission: Comissionado T - Task: Tarefeiro
/workers/workAssignments/standardPayPeriodHours /workers/workAssignments/standardPayPeriodHours/hoursQuantity /workers/workAssignments/standardPayPeriodHours/unitCode /workers/workAssignments/standardPayPeriodHours/unitCode/shortName	Worker's contractual standard monthly hours	Worker's contractual standard monthly hours	Quantidade de horas mensais do colaborador conforme histórico salarial vigente
/workers/workAssignments/baseRemuneration /workers/workAssignments/baseRemuneration/hourlyRateAmount /workers/workAssignments/baseRemuneration/hourlyRateAmount/amountValue /workers/workAssignments/baseRemuneration/hourlyRateAmount/currencyCode	Worker's base remuneration hourly rate	Worker's with salary type M or C, the value is the result of monthly salary / monthly hours. Worker's with salary type H or T, the value is the hour/task salary.	Para mensalistas e comissionados, será o resultado da fórmula salário contratual / carga horária mensal. Para horistas e tarefeiros, será o valor do salário hora/tarefa.
/workers/workAssignments/baseRemuneration/monthlyRateAmount /workers/workAssignments/baseRemuneration/monthlyRateAmount/amountValue /workers/workAssignments/baseRemuneration/monthlyRateAmount/currencyCode	Worker's base remuneration monthly rate	Worker's with salary type M or C, the value is the monthly salary. Worker's with salary type H or T, the value is the result of hour/task salary multiplied by the monthly hours/tasks.	Para mensalistas e comissionados, será o valor do salário contratual mensal. Para horistas e tarefeiros, será o resultado da fórmula: salário hora/tarefa multiplicado pela carga horária mensal.
/workers/workAssignments/baseRemuneration/recordingBasisCode /workers/workAssignments/baseRemuneration/recordingBasisCode/codeValue /workers/workAssignments/baseRemuneration/recordingBasisCode/shortName	Worker's remuneration recording basis	Worker's salary type. H - Hourly M - Monthly C - Commission T - Task	Código e nome do tipo salarial do colaborador H - Hourly: Horista M - Monthly: Mensalista C - Commission: Comissionado T - Task: Tarefeiro
/workers/workAssignments/baseRemuneration/effectiveDate	Worker's base remuneration effective date	Worker's base remuneration effective date	Data de início de validade do histórico salarial atual do colaborador

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
<code>/workers/workAssignments/additionalRemunerations</code>	Worker's additional remuneration details objects.	In this array, we'll have two different information, applicable only for workers with variable base remuneration: Additional remuneration description. Minimum guaranteed income.	Nesta lista, teremos duas informações, aplicáveis somente para colaboradores comissionados. Descrição da remuneração variável Mínimo garantido.
<code>/workers/workAssignments/additionalRemunerations/typeCode</code> <code>/workers/workAssignments/additionalRemunerations/typeCode/shortName</code>	Additional remuneration object type.	Additional remuneration object type. Possible values: "Variable income" "Minimum guaranteed income"	Nome do tipo do objeto de remuneração variável. Valores possíveis: "Variable income" "Minimum guaranteed income"
<code>/workers/workAssignments/additionalRemunerations/nameCode</code> <code>/workers/workAssignments/additionalRemunerations/nameCode/shortName</code> <code>/workers/workAssignments/additionalRemunerations/nameCode/longName</code>	Worker's additional remuneration description Not applicable for the Minimum guaranteed income object type.	Worker's additional remuneration description Not applicable for the Minimum guaranteed income object type.	Descrição da remuneração variável do colaborador. Não aplicável para o objeto de mínimo garantido.
<code>/workers/workAssignments/additionalRemunerations/rate</code> <code>/workers/workAssignments/additionalRemunerations/rate/amountValue</code>	Worker's minimum guaranteed income amount. Not applicable for the Variable Income object type.	Worker's minimum guaranteed income amount. Not applicable for the Variable Income object type.	Valor do mínimo garantido do colaborador. Não aplicável para o objeto de remuneração variável.
<code>/workers/workAssignments/reportsTo</code> <code>/workers/workAssignments/reportsTo/associateOID</code>	Worker's direct manager AOID	Worker's direct manager AOID	Código de pessoa do gestor imediato do colaborador no sistema eXpert. Para garantir unicidade, seguirá a regra: <"código do cliente">X<"código da pessoa"> Exemplo: 1X000001234
<code>/workers/workAssignments/reportsTo/workerID</code> <code>/workers/workAssignments/reportsTo/workerID/idValue</code>	Worker's direct manager Worker ID	Worker's direct manager Worker ID	Código de empregado do gestor imediato do colaborador no sistema eXpert. Para garantir unicidade, seguirá a regra: <"Código da empresa">-<"Matrícula"> Exemplo: 001-000005678 Se o empregado tiver mais de um contrato (multi-contrato ou

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
			readmissão), este campo será diferente para cada contrato.
/workers/workAssignments/reportsTo/reportsToWorkerName /workers/workAssignments/reportsTo/reportsToWorkerName/givenName /workers/workAssignments/reportsTo/reportsToWorkerName/middleName /workers/workAssignments/reportsTo/reportsToWorkerName/familyName1 /workers/workAssignments/reportsTo/reportsToWorkerName/formattedName	Worker's direct manager name	Worker's direct manager name	Nome completo do gestor imediato do colaborador
/workers/workAssignments/reportsTo/reportsToRelationshipCode /workers/workAssignments/reportsTo/reportsToRelationshipCode/itemID	Worker's direct manager type of relationship	Default "Manager"	Fixo "Manager"
/workers/workAssignments/payScaleCode /workers/workAssignments/payScaleCode/codeValue /workers/workAssignments/payScaleCode/shortName	Worker's pay scale (if applicable)	Worker's pay scale code and name (if applicable)	Se o colaborador é tabelado, demonstra o código e nome da tabela salarial do colaborador
/workers/workAssignments/payGradeCode /workers/workAssignments/payGradeCode/codeValue /workers/workAssignments/payGradeCode/shortName	Worker's pay grade (if applicable)	Worker's pay grade code and name (if applicable)	Código da faixa e nível salarial do colaborador. Nome da faixa salarial do colaborador
/workers/workAssignments/customFieldGroup /workers/workAssignments/customFieldGroup/indicatorFields /workers/workAssignments/customFieldGroup/indicatorFields/indicatorValue /workers/workAssignments/customFieldGroup/indicatorFields/itemID	Worker's indicator additional fields.	Currently it will have only one field "Disability Quota" that indicates if the disabled worker occupies disability quota or not.	Atualmente teremos apenas um campo neste grupo "Disability quota" que indicará se o colaborador PCD preenche cota ou não.
/workers/workAssignments/customFieldGroup/stringFields	Worker's string additional fields.	In this group of fields it'll be available the following fields:	Neste grupo de campos teremos os seguintes campos:

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/workers/workAssignments/customFieldGroup/stringFields/nameCode /workers/workAssignments/customFieldGroup/stringFields/nameCode/shortName /workers/workAssignments/customFieldGroup/stringFields/stringValue		Union Legal ID: Union's CNPJ number if the worker is filiated to a union different from the standard one. Legal authorization proceeding: Number of the legal proceeding authorizing the worker hire if applicable (minor worker's that aren't apprentices). Hire origination legal proceeding: Number of the legal proceeding that originated the hire, if applicable.	Union Legal ID: CNPJ do sindicato ao qual o colaborador está filiado, se diferente do padrão. Legal authorization proceeding: número do alvará judicial que autoriza a contratação, se aplicável (menores que não são admitidos como menor aprendiz por exemplo). Hire origination legal proceeding: número do processo judicial se a admissão foi motivada por decisão judicial.
/workers/customFieldGroup /workers/customFieldGroup/stringFields /workers/customFieldGroup/stringFields/nameCode /workers/customFieldGroup/stringFields/nameCode/shortName /workers/customFieldGroup/stringFields/stringValue /workers/customFieldGroup/stringFields/itemID	Worker's custom informations (fields defined by the client).	Worker's custom fields. In this array there'll be an object for each custom field informed for the worker the client has. The custom fields from the person and employment tables will be considered in this API.	Informações adicionais do cliente. Nesta lista de campos haverá um objeto para cada infadic preenchida no cadastro do colaborador que o cliente possua. Serão consideradas as infadics das tabelas de pessoa física e registro de emprego nesta API.

Appendix B: Worker Personnal Communication E-mail POST Data Dictionary

The data dictionary provides the schema resource to application user interface field mapping.

Events

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events /events/eventID	Event ID	External system reference ID	ID de Referência da solicitação no sistema externo.	Mandatory, must be an string.
/events/serviceCategoryCode /events/serviceCategoryCode/shortName	Service Category Code	Default "HR" in this API	Fixo HR	Mandatory, must be the value defined for this API
/events/eventNameCode /events/eventNameCode/shortName	Event Short Name	worker.personalCommunication.email. Example: worker.personalCommunication.email.add	worker.personalCommunication.email. Exemplo: worker.personalCommunication.email.add	Mandatory, must correspond to the API being called

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events/eventTitle	Event Title	Personal Communication Email Example: Personal Communication Email Add	Personal Communication Email Exemplo: Personal Communication Email Add	Mandatory, must correspond to the API being called
/events/recordDateTime /events/creationDate Time	Event record/creation date and time	External system record date/time	Data/hora da alteração no sistema externo.	Mandatory, must be the date/time when the event occurred in the system calling the API.

Events > Data > Event Context > Worker

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events/data/eventContext/worker/associateOID	Worker's associate OID	Worker's Associate OID Please consult the Appendix A for details of this field's rule.	Associate OID do colaborador Por favor consulte o Apendice A para detalhes da regra deste campo.	Mandatory, must be the associate OID of the employee being updated.
/events/data/eventContext/worker/workerID /events/data/eventContext/worker/workerID/idValue	Worker's worker ID	Worker's Worker ID Please consult the Appendix A for details of this field's rule.	Worker ID do colaborador Por favor consulte o Apendice A para detalhes da regra deste campo.	Mandatory, must be the worker ID of the employee being updated.

Events > Data > Transform > Person > Communication

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events/data/transform/worker/person/communication/email /events/data/transform/worker/person/communication/email/emailUri	New Email	New Worker Personnel E-mail	Novo e-mail do colaborador	Mandatory, must be the new value For the Remove Operation, this field will be desconsidered.

Appendix C: Worker Personnel Communication Landline POST Data Dictionary

The data dictionary provides the schema resource to application user interface field mapping.

Events

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events /events/eventID	Event ID	External system reference ID	ID de Referência da solicitação no sistema externo.	Mandatory, must be an string.
/events/serviceCategoryCode /events/serviceCategoryCode/shortName	Service Category Code	Default "HR" in this API	Fixo HR	Mandatory, must be the value defined for this API
/events/eventNameCode /events/eventNameCode/shortName	Event Short Name	worker.personalCommunication.landline. Example: worker.personalCommunication.landline.add	worker.personalCommunication.landline. Exemplo: worker.personalCommunication.landline.add	Mandatory, must correspond to the API being called
/events/eventTitle	Event Title	Personal Communication Landline Example: Personal Communication Landline Add	Personal Communication Landline Exemplo: Personal Communication Landline Add	Mandatory, must correspond to the API being called
/events/recordDateTime /events/creationDateTime	Event record/creation date and time	External system record date/time	Data/hora da alteração no sistema externo.	Mandatory, must be the date/time when the event occurred in the system calling the API.

Events > Data > Event Context > Worker

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events/data/eventContext/worker/associateOID	Worker's associate OID	Worker's Associate OID Please consult the Appendix A for details of this field's rule.	Associate OID do colaborador Por favor consulte o Apêndice A para detalhes da regra deste campo.	Mandatory, must be the associate OID of the employee being updated.
/events/data/eventContext/worker/workerID /events/data/eventContext/worker/workerID/idValue	Worker's worker ID	Worker's Worker ID Please consult the Appendix A for details of this field's rule.	Worker ID do colaborador Por favor consulte o Apêndice A para detalhes da regra deste campo.	Mandatory, must be the worker ID of the employee being updated.

Events > Data > Transform > Person > Communication

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events/data/transform/worker/person/communication/landline /events/data/transform/worker/person/communication/landline/areaDialing	New area dialing number	New area dialing number	Novo DDD do telefone fixo do colaborador	Mandatory, must be a valid area dialing code with the format XX or OXX Example: 11 or 011 For the Remove Operation, this field will be desconsidered.
/events/data/transform/worker/person/communication/landline/dialNumber	New dial number	New dial number	Novo número do telefone fixo do colaborador	Mandatory, must be a number with at least 8 digits. Don't use any separators in the number. For the Remove Operation, this field will be desconsidered.
/events/data/transform/worker/person/communication/landline/formattedNumber	New formatted number	+ Example: 011 33333333	DDD + Telefone Exemplo 011 33333333	Mandatory, must correspond to the areaDialing and dialNumber sent in the previous fields. Use a single space as separator between the both numbers.

Appendix D: Worker Personal Communication Mobile POST Data Dictionary

The data dictionary provides the schema resource to application user interface field mapping.

Events

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events /events/eventID	Event ID	External system reference ID	ID de Referência da solicitação no sistema externo.	Mandatory, must be an string.
/events/serviceCategoryCode /events/serviceCategoryCode/shortName	Service Category Code	Default "HR" in this API	Fixo HR	Mandatory, must be the value defined for this API
/events/eventNameCode /events/eventNameCode/shortName	Event Short Name	worker.personalCommunication.mobile. Example: worker.personalCommunication.mobile.add	worker.personalCommunication.mobile. Exemplo: worker.personalCommunication.mobile.add	Mandatory, must correspond to the API being called
/events/eventTitle	Event Title	Personal Communication Mobile Example:	Personal Communication Mobile Exemplo: Personal Communication Mobile	Mandatory, must correspond to the API being called

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
		Personal Communication Mobile Add	Add	
/events/recordDateTime /events/creationDateTime	Event record/creation date and time	External system record date/time	Data/hora da alteração no sistema externo.	Mandatory, must be the date/time when the event occurred in the system calling the API.

Events > Data > Event Context > Worker

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events/data/eventContext/worker/associateOID	Worker's associate OID	Worker's Associate OID Please consult the Appendix A for details of this field's rule.	Associate OID do colaborador Por favor consulte o Apêndice A para detalhes da regra deste campo.	Mandatory, must be the associate OID of the employee being updated.
/events/data/eventContext/worker/workerID /events/data/eventContext/worker/workerID/idValue	Worker's worker ID	Worker's Worker ID Please consult the Appendix A for details of this field's rule.	Worker ID do colaborador Por favor consulte o Apêndice A para detalhes da regra deste campo.	Mandatory, must be the worker ID of the employee being updated.

Events > Data > Transform > Person > Communication

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events/data/transform/worker/person/communication/mobile /events/data/transform/worker/person/communication/mobile/areaDialing	New area dialing number	New area dialing number	Novo DDD do celular do colaborador or	Mandatory, must be a valid area dialing code with the format XX or OXX Example: 11 or 011 For the Remove Operation, this field will be desconsidered.
/events/data/transform/worker/person/communication/mobile/dialNumber	New dial number	New dial number	Novo número do celular do colaborador	Mandatory, must be a number with at least 8 digits. Don't use any separators in the number. For the Remove Operation, this field will be desconsidered.
/events/data/transform/worker/person/communication/mobile/formattedNumber	New formatted number	Area dialing number + Dial Number	DDD + Celular Exemplo 011 999999999	Mandatory, must correspond to the areaDialing and dialNumber sent in the previous fields.

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
		Example: 011999999999		Use a single space as separator between the both numbers.

Appendix E: Worker Legal Address POST Data Dictionary

The data dictionary provides the schema resource to application user interface field mapping.

Events

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events /events/eventID	Event ID	External system reference ID	ID de Referência da solicitação no sistema externo.	Mandatory, must be an string.
/events/serviceCategoryCode /events/serviceCategoryCode/shortName	Service Category Code	Default "HR" in this API	Fixo HR	Mandatory, must be the value defined for this API
/events/eventNameCode /events/eventNameCode/shortName	Event Short Name	worker.legal-address. Example: worker.legal-address.change	worker.legal-address. Exemplo: worker.legal-address.change	Mandatory, must correspond to the API being called
/events/eventTitle	Event Title	Worker Legal Address Example: Worker Legal Address Change	Worker Legal Address Exemplo: Worker Legal Address Change	Mandatory, must correspond to the API being called
/events/recordDateTime /events/creationDateTime	Event record/creation date and time	External system record date/time	Data/hora da alteração no sistema externo.	Mandatory, must be the date/time when the event occurred in the system calling the API.

Events > Data > Event Context > Worker

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events/data/eventContext/worker/associateOID	Worker's associate OID	Worker's Associate OID Please consult the Appendix A for details of this field's rule.	Associate OID do colaborador Por favor consulte o Apêndice A para detalhes da regra deste campo.	Mandatory, must be the associate OID of the employee being updated.

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events/data/eventContext/worker/workerID /events/data/eventContext/worker/workerID/idValue	Worker's worker ID	Worker's Worker ID Please consult the Appendix A for details of this field's rule.	Worker ID do colaborador Por favor consulte o Apendice A para detalhes da regra deste campo.	Mandatory, must be the worker ID of the employee being updated.

Events > Data > Transform > Person > Legal Address

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events/data/transform/worker/person/legalAddresses/lineOne /events/data/transform/worker/person/legalAddresses/lineTwo /events/data/transform/worker/person/legalAddresses/lineThree	This is the primary residential address that is used by an organization.	Worker's address with the following rule: LineOne: street type, street name and address complement. LineTwo: Neighbourhood name, city name and state code. LineThree: postal code	Endereço do colaborador, com a seguinte divisão: LineOne: Tipo, Logradouro e Complemento de endereço LineTwo: Bairro, Município e Estado. LineThree: CEP	These first fields are optional and informational only, won't be considered in the actual data update process.
/events/data/transform/worker/person/legalAddresses/cityName	City Name	City Name: city name	City Name: nome do município	This field only will be considered for foreign addresses, as for brazilian addresses the city name is derived from the postal code.
/events/data/transform/worker/person/legalAddresses/countrySubdivisionLevel1/codeValue /events/data/transform/worker/person/legalAddresses/countrySubdivisionLevel1/shortName /events/data/transform/worker/person/legalAddress/countrySubdivisionLevel1/subdivisionType	Country Subdivision	Country Subdivision: state code and name	Country Subdivision: Estado	These first fields are optional and informational only, won't be considered in the actual data update process, as this information will be derived from the postal code.
/events/data/transform/worker/person/legalAddresses/countryCode	Country Code	Country Code in the ISO-3166 table.	Código do país conforme ISO-3166	Must be the valid ISO-3166 country code.
/events/data/transform/worker/person/legalAddresses/postalCode	Postal Code	Address postal code	CEP	Must be the valid postal code (only numbers), could be the generic city/block number if there's no specific postal code for the address.

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
				For foreign addresses, this would be the postal box number (maximum of 10 characters)
/events/data/transform/worker/person/legalAddresses/blockName	Block Name	Neighbourhood name	Nome do Bairro	If the address is brazilian and the postal code isn't a generic postal code, this field won't be considered. For foreign address and cases where the postal code is generic, this must be the block/neighbourhood name.
/events/data/transform/worker/person/legalAddresses/streetName /events/data/transform/worker/person/legalAddress/streetTypeCode /events/data/transform/worker/person/legalAddress/streetTypeCode/shortName	Street	Street Name: logradouro Street Type: street type identification	Street Name: logradouro Street Type: Tipo de Logradouro	These two fields only will be considered when the address is foreign or the postal code is generic. Otherwise, this will be derived from the postal code. In these cases, the street type must be an option valid per eSocial table 20 and the street name must be informed.
/events/data/transform/worker/person/legalAddresses/buildingNumber	Building Number	Building Number	Número do endereço	Maximum of 10 characters.
/events/data/transform/worker/person/legalAddress/unit	Unit	Address complement	Complemento do endereço	Maximum of 30 characters.

Appendix F: Worker Government IDs Add/Change POST Data Dictionary

The data dictionary provides the schema resource to application user interface field mapping.

Events

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events /events/eventID	Event ID	External system reference ID	ID de Referência da solicitação no sistema externo.	Mandatory, must be an string.
/events/serviceCategoryCode /events/serviceCategoryCode/shortName	Service Category Code	Default "HR" in this API	Fixo HR	Mandatory, must be the value defined for this API

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events/eventNameCode /events/eventNameCode/shortName	Event Short Name	worker.governmentID Example: worker.governmentID.add	worker.governmentID Exemplo: worker.governmentID.add	Mandatory, must correspond to the API being called
/events/eventTitle	Event Title	Worker GovernmentID Example: Worker GovernmentID Add	Worker GovernmentID Exemplo: Worker GovernmentID Add	Mandatory, must correspond to the API being called
/events/recordDateTime /events/creationDateTime	Event record/creation date and time	External system record date/time	Data/hora da alteração no sistema externo.	Mandatory, must be the date/time when the event occurred in the system calling the API.

Events > Data > Event Context > Worker

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events/data/eventContext/worker/associateOID	Worker's associate OID	Worker's Associate OID Please consult the Appendix A for details of this field's rule.	Associate OID do colaborador Por favor consulte o Apendice A para detalhes da regra deste campo.	Mandatory, must be the associate OID of the employee being updated.
/events/data/eventContext/worker/workerID /events/data/eventContext/worker/workerID/idValue	Worker's worker ID	Worker's Worker ID Please consult the Appendix A for details of this field's rule.	Worker ID do colaborador Por favor consulte o Apendice A para detalhes da regra deste campo.	Mandatory, must be the worker ID of the employee being updated.

Events > Data > Transform > Worker > Person > Government ID

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events/data/transform /events/data/transform/worker /events/data/transform/worker/person /events/data/transform/worker/person/governmentID	Government issued document number.	Will be expected the following documents: RG, RNE, CPF, CTPS, PIS, Military Reserver Certificate, Driver's licence, RIC, OC and eSocial ID.	Serão esperados os dados de RG, RNE, CPF, CTPS, PIS, Certificado de Reservista, Título de Eleitor, CNH, RIC, OC e Matrícula eSocial.	Mandatory field. For each document informed, the number must be the worker's valid document number, respecting the maximum size and formation rule. No two workers will have the same government ID numbers.

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events/data/transform/worker/person/governmentID/idValue				
/events/data/transform/worker/person/governmentID/nameCode /events/data/transform/worker/person/governmentID/nameCode/codeValue	Government issued category (when applicable)	The code field will be used to inform the other fields for each document, when applicable: Driver's licence: Category, Issuing Body and Issuing State RG: Issuing body and state. Voter's registration: zone, section and voting city. RNE, RIC and OC: issuing body CTPS: serie number and state.	O campo de código será utilizado para as informações complementares dos documentos: Driver's licence: categoria, órgão emissor e UF de emissão. RG: órgão e estado de emissão. Voter's registration: zona, seção e código do município de votação. RNE, RIC and OC: órgão emissor CTPS: série e UF.	Mandatory field for documents that have this information in eXpert. The codeValue field is optional and will expect the information according to the type of document, when applicable.
/events/data/transform/worker/person/governmentID/nameCode/shortName	Government issued document name	The shortName field must have the name of the reported document.	O campo de nome deverá conter o nome do documento.	The shortName field is mandatory, must correspond to the government ID type name (CPF, RNE, RG, CTPS, PIS, Certificado de Reservista, Título de Eleitor, CNH, RIC, OC, CNS)
/events/data/transform/worker/person/governmentID/statusCode /events/data/transform/worker/person/governmentID/statusCode/effectiveDate	Government issued document issue date.	Document issue date if this information is stored in eXpert. (RNE, RG, CTPS, PIS, CNH, RIC, OC)	Data de expedição para documentos que tem campo para essa informação. (RNE, RG, CTPS, PIS, CNH, RIC, OC)	Mandatory field for documents that have this information in eXpert. If informed, must be a valid date higher than the worker's birth date.
/events/data/transform/worker/person/governmentID/expirationDate	Government issued document expiration date (when applicable)	Document expiration date if this information is stored in eXpert (only driver's licence and OC).	Data de validade para documentos que tem essa informação no sistema (CNH e OC).	Mandatory field for documents that have this information in eXpert. If informed, must be a valid future date.

Appendix G: Worker Government IDs Remove POST Data Dictionary

The data dictionary provides the schema resource to application user interface field mapping.

Events

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events /events/eventID	Event ID	External system reference ID	ID de Referência da solicitação no sistema externo.	Mandatory, must be an string.
/events/serviceCategoryCode /events/serviceCategoryCode/shortName	Service Category Code	Default "HR" in this API	Fixo HR	Mandatory, must be the value defined for this API
/events/eventNameCode /events/eventNameCode/shortName	Event Short Name	worker.governmentID.remove	worker.governmentID.remove	Mandatory, must correspond to the API being called
/events/eventTitle	Event Title	Worker GovernmentID Remove	Worker GovernmentID Remove	Mandatory, must correspond to the API being called
/events/recordDateTime /events/creationDateTime	Event record/creation date and time	External system record date/time	External system record date/time	Mandatory, must be the date/time when the event occurred in the system calling the API.

Events > Data > Event Context > Worker

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events/data/eventContext/worker/associateOID	Worker's associate OID	Worker's Associate OID Please consult the Appendix A for details of this field's rule.	Associate OID do colaborador Por favor consulte o Apêndice A para detalhes da regra deste campo.	Mandatory, must be the associate OID of the employee being updated.
/events/data/eventContext/worker/workerID /events/data/eventContext/worker/workerID/idValue	Worker's worker ID	Worker's Worker ID Please consult the Appendix A for details of this field's rule.	Worker ID do colaborador Por favor consulte o Apêndice A para detalhes da regra deste campo.	Mandatory, must be the worker ID of the employee being updated.

Events > Data > Transform > Worker > Person > Government ID

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events/data/transform /events/data/transform/worker	Government issued document name	The itemID field must have the name of the reported document.	O campo de itemID deverá conter o nome do documento.	The itemID field is mandatory, must correspond to the government ID type name (CPF, RNE, RG, CTPS, PIS, Certificado de Reservista, Título de Eleitor, CNH, RIC, OC, CNS)

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/ events/data/transform/worker/person / events/data/transform/worker/person/governmentID / events/data/transform/worker/person/governmentID/itemID				

Appendix H: Worker Business Communication E-mail POST Data Dictionary

The data dictionary provides the schema resource to application user interface field mapping.

Events

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/ events / events/eventID	Event ID	External system reference ID	ID de Referência da solicitação no sistema externo.	Mandatory, must be an string.
/ events/serviceCategoryCode / events/serviceCategoryCode/shortName	Service Category Code	Default "HR" in this API	Fixo HR	Mandatory, must be the value defined for this API
/ events/eventNameCode / events/eventNameCode/shortName	Event Short Name	worker.businessCommunication.email. Example: worker.businessCommunication.email.add	worker.businessCommunication.email. Exemplo: worker.businessCommunication.email.add	Mandatory, must correspond to the API being called
/ events/eventTitle	Event Title	Business Communication Email Example: Business Communication Email Add	Business Communication Email Exemplo: Business Communication Email Add	Mandatory, must correspond to the API being called
/ events/recordDateTime / events/creationDateTime	Event record/creation date and time	External system record date/time	Data/hora da alteração no sistema externo.	Mandatory, must be the date/time when the event occurred in the system calling the API.

Events > Data > Event Context > Worker

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events/data/eventContext/worker/associateOID	Worker's associate OID	Worker's Associate OID Please consult the Appendix A for details of this field's rule.	Associate OID do colaborador Por favor consulte o Apendice A para detalhes da regra deste campo.	Mandatory, must be the associate OID of the employee being updated.
/events/data/eventContext/worker/workerID /events/data/eventContext/worker/workerID/idValue	Worker's worker ID	Worker's Worker ID Please consult the Appendix A for details of this field's rule.	Worker ID do colaborador Por favor consulte o Apendice A para detalhes da regra deste campo.	Mandatory, must be the worker ID of the employee being updated.

Events > Data > Transform > Worker > Business Communication

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events/data/transform /events/data/transform/worker /events/data/transform/worker/businesscommunication /events/data/transform/worker/businesscommunication/email /events/data/transform/worker/businesscommunication/email/emailUri	New Email	New Worker Business E-mail	Novo e-mail do colaborador	Mandatory, must be the new value For the Remove Operation, this field will be desconsidered.

Appendix I: Worker Business Communication Mobile POST Data Dictionary

The data dictionary provides the schema resource to application user interface field mapping.

Events

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events /events/eventID	Event ID	External system reference ID	ID de Referência da solicitação no sistema externo.	Mandatory, must be an string.
/events/serviceCategoryCode /events/serviceCategoryCode/shortName	Service Category Code	Default "HR" in this API	Fixo HR	Mandatory, must be the value defined for this API
/events/eventNameCode /events/eventNameCode/shortName	Event Short Name	worker.businessCommunication.mobile. Example:	worker.businessCommunication.mobile. Exemplo:	Mandatory, must correspond to the API being called

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
		worker.businessCommunication.mobile.add	worker.businessCommunication.mobile.add	
/events/eventTitle	Event Title	Business Communication Mobile Example: Business Communication Mobile Add	Business Communication Mobile Exemplo: Business Communication Mobile Add	Mandatory, must correspond to the API being called
/events/recordDateTime /events/creationDate Time	Event record/creation date and time	External system record date/time	Data/hora da alteração no sistema externo.	Mandatory, must be the date/time when the event occurred in the system calling the API.

Events > Data > Event Context > Worker

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events/data/eventContext/worker/associateOID	Worker's associate OID	Worker's Associate OID Please consult the Appendix A for details of this field's rule.	Associate OID do colaborador Por favor consulte o Apendice A para detalhes da regra deste campo.	Mandatory, must be the associate OID of the employee being updated.
/events/data/eventContext/worker/workerID /events/data/eventContext/worker/workerID/idValue	Worker's worker ID	Worker's Worker ID Please consult the Appendix A for details of this field's rule.	Worker ID do colaborador Por favor consulte o Apendice A para detalhes da regra deste campo.	Mandatory, must be the worker ID of the employee being updated.

Events > Data > Transform > Person > Communication

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events/data/transform/worker/person/communication/mobile /events/data/transform/worker/person/communication/mobile/areaDialing	New area dialing number	New area dialing number	Novo DDD do telefone comercial do colaborador	Mandatory, must be a valid area dialing code with the format XX or OXX Example: 11 or 011 For the Remove Operation, this field will be desconsidered.
/events/data/transform/worker/person/communication/mobile/dialNumber	New dial number	New dial number	Novo número do telefone comercial do colaborador	Mandatory, must be a number with at least 8 digits. Don't use any separators in the number.

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
				For the Remove Operation, this field will be desconsidered.
/events/data/transform/worker/person/communication/mobile/formattedNumber	New formatted number	Area dialing number + Dial number Example: 011 999999999	DDD + Telefone Comercial Exemplo 011 999999999	Mandatory, must correspond to the areaDialing and dialNumber sent in the previous fields. Use a single space as separator between the both numbers. For the Remove Operation, this field will be desconsidered.

Appendix J: Worker Personal Communication E-mail EVENT Data Dictionary

The data dictionary provides the schema resource to application user interface field mapping.

Events

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/events /events/eventID	Event ID	Event ID	ID do evento
/events/serviceCategoryCode /events/serviceCategoryCode/shortName	Service Category Code	Default "HR" in this API	Fixo HR
/events/eventNameCode /events/eventNameCode/shortName	Event Short Name	worker.personalCommunication.email.change	worker.personalCommunication.email.change
/events/eventTitle	Event Title	Personal Communication Email Change	Personal Communication Email Change
/events/recordDateTime /events/creationDateTime	Event record/creation date and time	Change record/creation date and time	Data/hora da alteração
/events/effectiveDate	Event effective date	Change record/creation date and time	Data/hora da alteração

Events > Data > Event Context > Worker

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/events/data/eventContext/worker/associateOID	Worker's associate OID	Worker's Associate OID	Associate OID do colaborador

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
		Please consult the Appendix A for details of this field's rule.	Por favor consulte o Apendice A para detalhes da regra deste campo.
/events/data/eventContext/worker/workerID /events/data/eventContext/worker/workerID/idValue	Worker's worker ID	Worker's Worker ID Please consult the Appendix A for details of this field's rule.	Worker ID do colaborador Por favor consulte o Apendice A para detalhes da regra deste campo.

Events > Data > Output > Person > Communication

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/events/data/output/worker/person/communication/email /events/data/output/worker/person/communication/email/emailUri	New Email	New Worker Personnal E-mail	Novo e-mail do colaborador

Appendix K: Worker Personnal Communication Landline EVENT Data Dictionary

The data dictionary provides the schema resource to application user interface field mapping.

Events

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/events /events/eventID	Event ID	Event ID	ID do evento
/events/serviceCategoryCode /events/serviceCategoryCode/shortName	Service Category Code	Default "HR" in this API	Fixo HR
/events/eventNameCode /events/eventNameCode/shortName	Event Short Name	worker.personalCommunication.landline.change	worker.personalCommunication.landline.change
/events/eventTitle	Event Title	Personal Communication Landline Change	Personal Communication Landline Change
/events/recordDateTime /events/creationDateTime	Event record/creation date and time	Change record/creation date and time	Data/hora da alteração
/events/effectiveDate	Event effective date	Change record/creation date and time	Data/hora da alteração

Events > Data > Event Context > Worker

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/events/data/eventContext/worker/associateOID	Worker's associate OID	Worker's Associate OID Please consult the Appendix A for details of this field's rule.	Associate OID do colaborador Por favor consulte o Apêndice A para detalhes da regra deste campo.
/events/data/eventContext/worker/workerID /events/data/eventContext/worker/workerID/idValue	Worker's worker ID	Worker's Worker ID Please consult the Appendix A for details of this field's rule.	Worker ID do colaborador Por favor consulte o Apêndice A para detalhes da regra deste campo.

Events > Data > Output > Person > Communication

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/events/data/output/worker/person/communication/landline /events/data/output/worker/person/communication/landline/areaDialing	New area dialing number	New area dialing number	Novo DDD do telefone fixo do colaborador
/events/data/output/worker/person/communication/landline/dialNumber	New dial number	New dial number	Novo número do telefone fixo do colaborador
/events/data/output/worker/person/communication/landline/formattedNumber	New formatted number	Area dialing number + Dial number Example: 011 33333333	DDD + Telefone Exemplo 011 33333333

Appendix L: Worker Personal Communication Mobile EVENT Data Dictionary

The data dictionary provides the schema resource to application user interface field mapping.

Events

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/events /events/eventID	Event ID	Event ID	ID do evento
/events/serviceCategoryCode /events/serviceCategoryCode/shortName	Service Category Code	Default "HR" in this API	Fixo HR
/events/eventNameCode /events/eventNameCode/shortName	Event Short Name	worker.personalCommunication.mobile.change	worker.personalCommunication.mobile.change
/events/eventTitle	Event Title	Personal Communication Mobile Change	Personal Communication Mobile Change

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/events/recordDateTime /events/creationDateTime	Event record/creation date and time	Change record/creation date and time	Data/hora da alteração
/events/effectiveDate	Event effective date	Change record/creation date and time	Data/hora da alteração

Events > Data > Event Context > Worker

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/events/data/eventContext/worker/associateOID	Worker's associate OID	Worker's Associate OID Please consult the Appendix A for details of this field's rule.	Associate OID do colaborador Por favor consulte o Apendice A para detalhes da regra deste campo.
/events/data/eventContext/worker/workerID /events/data/eventContext/worker/workerID/idValue	Worker's worker ID	Worker's Worker ID Please consult the Appendix A for details of this field's rule.	Worker ID do colaborador Por favor consulte o Apendice A para detalhes da regra deste campo.

Events > Data > Output > Person > Communication

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/events/data/output/worker/person/communication/mobile /events/data/output/worker/person/communication/mobile/areaDialing	New area dialing number	New area dialing number	Novo DDD do celular do colaborador
/events/data/output/worker/person/communication/mobile/dialNumber	New dial number	New dial number	Novo número do celular do colaborador
/events/data/output/worker/person/communication/mobile/formattedNumber	New formatted number	Area dialing number + Dial number Example: 011 999999999	DDD + Celular Exemplo 011 999999999

Appendix M: Worker Legal Address EVENT Data Dictionary

The data dictionary provides the schema resource to application user interface field mapping.

Events

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/events /events/eventID	Event ID	Event ID	ID do evento
/events/serviceCategoryCode /events/serviceCategoryCode/shortName	Service Category Code	Default "HR" in this API	Fixo HR
/events/eventNameCode /events/eventNameCode/shortName	Event Short Name	worker.legal-address.change	worker.legal-address.change
/events/eventTitle	Event Title	Worker Legal Address Change	Worker Legal Address Change
/events/recordDateTime /events/creationDateTime	Event record/creation date and time	Change record/creation date and time	Data/hora da alteração
/events/effectiveDate	Event effective date	Change record/creation date and time	Data/hora da alteração

Events > Data > Event Context > Worker

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/events/data/eventContext/worker/associateOID	Worker's associate OID	Worker's Associate OID Please consult the Appendix A for details of this field's rule.	Associate OID do colaborador Por favor consulte o Apêndice A para detalhes da regra deste campo.
/events/data/eventContext/worker/workerID /events/data/eventContext/worker/workerID/idValue	Worker's worker ID	Worker's Worker ID Please consult the Appendix A for details of this field's rule.	Worker ID do colaborador Por favor consulte o Apêndice A para detalhes da regra deste campo.

Events > Data > Output > Person > Legal Address

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/events/data/output/worker/person/legalAddresses/lineOne /events/data/output/worker/person/legalAddresses/lineTwo /events/data/output/worker/person/legalAddresses/lineThree	This is the primary residential address that is used by an organization.	Worker's address with the following rule: LineOne: street type, street name and address complement. LineTwo: Neighbourhood name, city name and state code. LineThree: postal code	Endereço do colaborador, com a seguinte divisão: LineOne: Tipo, Logradouro e Complemento de endereço LineTwo: Bairro, Município e Estado. LineThree: CEP
/events/data/output/worker/person/legalAddresses/cityName	City Name	City Name: city name	City Name: nome do município
/events/data/output/worker/person/legalAddresses/countrySubdivisionLevel1/codeValue /events/data/output/worker/person/legalAddresses/countrySubdivisionLevel1/shortName /events/data/output/worker/person/legalAddress/countrySubdivisionLevel1/subdivisionType	Country Subdivision	Country Subdivision: state code and name	Country Subdivision: Estado
/events/data/output/worker/person/legalAddresses/countryCode	Country Code	Country Code in the ISO-3166 table.	Código do país conforme ISO-3166
/events/data/output/worker/person/legalAddresses/postalCode	Postal Code	Address postal code	CEP
/events/data/output/worker/person/legalAddresses/blockName	Block Name	Neighbourhood name	Nome do Bairro
/events/data/output/worker/person/legalAddresses/streetName /events/data/output/worker/person/legalAddress/streetTypeCode /events/data/output/worker/person/legalAddress/streetTypeCode/shortName	Street	Street Name: logradouro Street Type: street type identification	Street Name: logradouro Street Type: Tipo de Logradouro
/events/data/output/worker/person/legalAddresses/buildingNumber	Building Number	Building Number	Número do endereço
/events/data/output/worker/person/legalAddress/unit	Unit	Address complement	Complemento do endereço

Appendix N: Worker Government IDs Add/Change EVENT Data Dictionary

The data dictionary provides the schema resource to application user interface field mapping.

Events

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/events /events/eventID	Event ID	Event ID	ID do evento
/events/serviceCategoryCode /events/serviceCategoryCode/shortName	Service Category Code	Default "HR" in this API	Fixo HR
/events/eventNameCode /events/eventNameCode/shortName	Event Short Name	worker.governmentID.change	worker.governmentID.change
/events/eventTitle	Event Title	Worker GovernmentID Change	Worker GovernmentID Change
/events/recordDateTime /events/creationDateTime	Event record/creation date and time	Change record/creation date and time	Data/hora da alteração
/events/effectiveDateTime	Event record/creation date and time	Change record/creation date and time	Data/hora da alteração

Events > Data > Event Context > Worker

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/events/data/eventContext/worker/associateOID	Worker's associate OID	Worker's Associate OID Please check the Appendix A for details of this field's rule.	Associate OID do colaborador Por favor consulte o Apendice A para detalhes da regra deste campo.
/events/data/eventContext/worker/workerID /events/data/eventContext/worker/workerID/idValue	Worker's worker ID	Worker's Worker ID Please check the Appendix A for details of this field's rule.	Worker ID do colaborador Por favor consulte o Apendice A para detalhes da regra deste campo.

Events > Data > Output > Worker > Person > Government ID

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/events/data/output /events/data/output/worker /events/data/output/worker/person /events/data/output/worker/person/governmentID	Government issued document number.	Government ID number. The Government ID may be of one of the following types: RG, RNE, CPF, CTPS, PIS, Military Reserver Certificate, Driver's licence, RIC, OC and eSocial ID.	Número do documento O documento pode ser dos seguintes tipos: RG, RNE, CPF, CTPS, PIS, Certificado de Reservista, Título de Eleitor, CNH, RIC, OC e Matrícula eSocial.

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>
/events/data/output/worker/person/governmentID/idValue			
/events/data/transform/worker/person/governmentID/nameCode /events/data/transform/worker/person/governmentID/nameCode/codeValue	Government issued category (when applicable)	The code field will be used to inform the other fields for each document, when applicable: Driver's licence: Category, Issuing Body and IssuingState RG: Issuing body and state. Voter's registration: zone, section and voting city. RNE, RIC and OC: issuing body CTPS: serie number and state.	O campo de código será utilizado para as informações complementares dos documentos: Driver's licence: categoria, órgão emissor e UF de emissão. RG: órgão e estado de emissão. Voter's registration: zona, seção e código do município de votação. RNE, RIC and OC: órgão emissor CTPS: série e UF.
/events/data/transform/worker/person/governmentID/nameCode/shortName	Government issued document name	The shortName field will have the name of the type of the reported document.	O campo de nome irá conter o nome do tipo do documento.
/events/data/transform/worker/person/governmentID/statusCode /events/data/transform/worker/person/governmentID/statusCode/effectiveDate	Government issued document issue date.	Document issue date if this information is stored in eXpert. (applicable only for RNE, RG, CTPS, PIS, CNH, RIC, OC)	Data de expedição para documentos que tem campo para essa informação. (aplicável somente para RNE, RG, CTPS, PIS, CNH, RIC, OC)
/events/data/transform/worker/person/governmentID/expirationDate	Government issued document expiration date (when applicable)	Document expiration date if this information is stored in eXpert (applicable only for driver's license for brazilians, driver's license, CTPS and RNE for foreign workers).	Data de validade para documentos que tem essa informação no sistema (aplicável somente para CNH para brasileiros, CNH, CTPS e RNE para estrangeiros).

Appendix O: Worker Alternate IDs Change POST Data Dictionary

The data dictionary provides the schema resource to application user interface field mapping.

Events

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events /events/eventID	Event ID	External system reference ID	ID de Referência da solicitação no sistema externo.	Mandatory, must be an string.
/events/serviceCategoryCode /events/serviceCategoryCode/shortName	Service Category Code	Default "HR" in this API	Fixo HR	Mandatory, must be the value defined for this API
/events/eventNameCode	Event Short Name	worker.alternate-id.change	worker.alternate-id.change	Mandatory, must correspond to the API being called

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events/eventNameCode/shortName				
/events/eventTitle	Event Title	Change Worker Alternate ID	Change Worker Alternate ID	Mandatory, must correspond to the API being called
/events/recordDateTime /events/creationDateTime	Event record/creation date and time	External system record date/time	Data/hora da alteração no sistema externo.	Mandatory, must be the date/time when the event occurred in the system calling the API.

Events > Data > Event Context > Worker

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events/data/eventContext/worker/associateOID	Worker's associate OID	Worker's Associate OID Please consult the Appendix A for details of this field's rule.	Associate OID do colaborador Por favor consulte o Apêndice A para detalhes da regra deste campo.	Mandatory, must be the associate OID of the employee being updated.
/events/data/eventContext/worker/workerID /events/data/eventContext/worker/workerID/idValue	Worker's worker ID	Worker's Worker ID Please consult the Appendix A for details of this field's rule.	Worker ID do colaborador Por favor consulte o Apêndice A para detalhes da regra deste campo.	Mandatory, must be the worker ID of the employee being updated.

Events > Data > Transform > Worker > Alternate ID

<i>Canonical Field</i>	<i>Label</i>	<i>SOR Rule for Regular Workers</i>	<i>SOR Rule for Regular Workers (in local language)</i>	<i>Validations</i>
/events/data/transform /events/data/transform/worker /events/data/transform/worker/alternateID /events/data/transform/worker/alternateID/idValue	New alternate ID	New alternate ID	Novo ID Global	Mandatory, must follow the size configured for the client. This ID must be unique for each person, no two workers may have the same alternate ID.