

Chapter 3

Retrieving Your Subscribers Client ID and Client Secret

from How to retrieve Client Credentials of a Subscriber
Guide

Published on
Jun 21, 2021 9:19AM

Last modified
Feb 21, 2022 3:55PM



ADP Copyright Information

ADP, the ADP logo, and Always Designing for People are trademarks of ADP, Inc.

Windows is a registered trademark of the Microsoft Corporation.


All other trademarks are the property of their respective owners.

Copyright © 2022 ADP, Inc. ADP Proprietary and Confidential - All Rights Reserved. These materials may not be reproduced in any format without the express written permission of ADP, Inc.

These materials may not be reproduced in any format without the express written permission of ADP, Inc. ADP provides this publication "as is" without warranty of any kind, either expressed or implied, including, but not limited to, the implied warranties of merchantability or fitness for a particular purpose. ADP is not responsible for any technical inaccuracies or typographical errors which may be contained in this publication. Changes are periodically made to the information herein, and such changes will be incorporated in new editions of this publication. ADP may make improvements and/or changes in the product and/or the programmes described in this publication.

Published on
Jun 21, 2021 9:19AM

Last modified
Feb 21, 2022 3:55PM

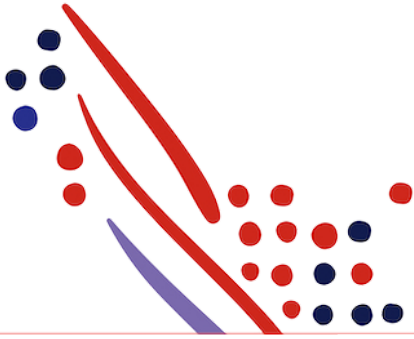

Chapter Contents

Chapter 3

Retrieving Your Subscribers Client ID and Client Secret

Chapter 3

Retrieving Your Subscribers Client ID and Client Secret

Calling to the `credentials.read` endpoint

1. For the next step you will use the access token you retrieved in the last chapter
2. That Access Token will be used to make a POST call to the endpoint below
<https://api.adp.com/events/core/v1/consumer-application-subscription-credentials.read>

Header	Value
Authorization: Bearer	You will fill in your Partner Token Here that you retrieved in the previous chapter

3. Sample Payload Filled by Subscribers OOID

```
{
  "events": [
    {
      "serviceCategoryCode": {
        "codeValue": "core"
      },
      "eventNameCode": {
        "codeValue": "consumer-application-subscription-credential.read"
      },
      "data": {
        "transform": {
          "queryParameter": "$filter=subscriberOrganizationOID eq 'OOID of Your Subscriber Goes Here'"
        }
      }
    }
  ]
}
```

4. This will return the **Subscribers Client ID** and **Client Secret** see Example below

```
{
  "events": [
    {
      "eventStatusCode": {
        "codeValue": "complete",
        "shortName": "Complete"
      },
      "data": {
        "output": {
          "consumerApplicationSubscriptionCredentials": [
            {
              "subscriberOrganizationOID": "G3DX22X1XF11BQ8D",
              "clientId": "b411ee37",
              "clientSecret": "5a951a02"
            }
          ]
        }
      },
      "eventID": "44bf6c47-2a14-4982-b7c3-4a98bab3036c",
      "eventNameCode": {
        "codeValue": "consumer-application-subscription-credentials.read"
      },
      "recordDateTime": "2021-06-21T17:34:12.989Z",
      "creationDateTime": "2021-06-21T17:34:12.989Z",
      "effectiveDateTime": "2021-06-21T17:34:12.989Z",
      "serviceCategoryCode": {
        "codeValue": "hr"
      },
      "actor": {
        "associateOID": "G2P6JZB1WPFWB87A"
      },
      "originator": {
        "associateOID": "G2P6JZB1WPFWB87A"
      }
    }
  ]
}
```



Tip

You will only be returned the Client ID and Client Secret if a client has already consented to your partner solution.

