
Guide

Worker Terminate API Guide for ADP Enterprise HR

Published on
Jun 03, 2020 3:40PM

Last modified
Feb 16, 2022 3:42PM

Always Designing for People™

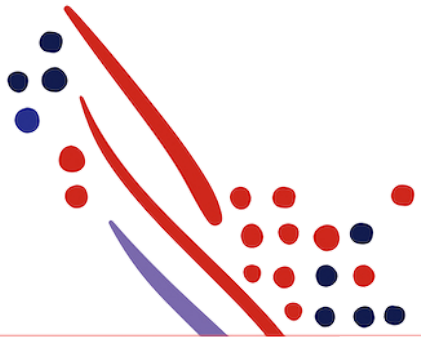

ADP Copyright Information

ADP, the ADP logo, and Always Designing for People are trademarks of ADP, Inc.

Windows is a registered trademark of the Microsoft Corporation.

All other trademarks are the property of their respective owners.

Copyright © 2022 ADP, Inc. ADP Proprietary and Confidential - All Rights Reserved. These materials may not be reproduced in any format without the express written permission of ADP, Inc.

These materials may not be reproduced in any format without the express written permission of ADP, Inc. ADP provides this publication "as is" without warranty of any kind, either expressed or implied, including, but not limited to, the implied warranties of merchantability or fitness for a particular purpose. ADP is not responsible for any technical inaccurancies or typographical errors which may be contained in this publication. Changes are periodically made to the information herein, and such changes will be incorporated in new editions of this publication. ADP may make improvements and/or changes in the product and/or the programes described in this publication.

Published on
Jun 03, 2020 3:40PM

Last modified
Feb 16, 2022 3:42PM

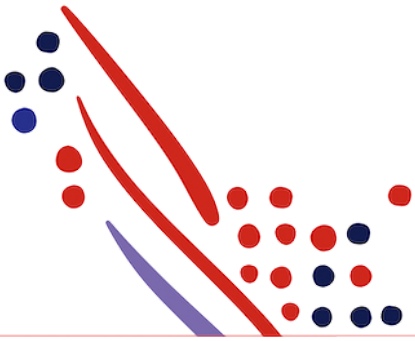


Table of Contents

Chapter 1

About this API

- Summary
- What's New in this Guide?
- Supported Product Version and Customer Base
- Required Setup Steps
- Process Overview
- Postman Collection

Chapter 2

Use Case: Terminating a Worker's Assignment

- Use Case Description
- API Usage
- Application Scope
- Supported Actors
- Request Header Parameters
- Sequence of Interactions
- Data Dictionary
- Responses

Chapter 1

About this API

Summary

The Worker Terminate Application Programming Interface (APIs) is used to terminate a worker's work assignment.

What's New in this Guide?

The content in this guide was just moved from the ADP Enterprise Data Dictionary and expanded upon. In this section, revisions to the Worker Terminate API and this guide will be announced.

Supported Product Version and Customer Base

More information to come

Required Setup Steps

More information to come

Process Overview

The following table illustrates the key data flow steps.

	Actor	Task Description
1		
2		

Postman Collection

Postman allows you to import a collection of APIs, created by others, so you can try them out. For more information on Postman, see Making Your First API Call Using Postman.

To download API collections for the <API Name> from the ADP GitHub library and import them to Postman, go to <Postman Collection Link>.

Chapter 2

Use Case: Terminating a Worker's Assignment

Use Case Description

This use case terminates a worker's assignment.

API Usage

Method	Uniform Resource Identifier (URI)	Description	GitHub Sample Request Payload	GitHub Sample Response Payload
POST	/events/hr/v1/worker.terminate		{"events": [{"data": { "eventContext": {"worker": {"associateOID": "G3M8GYJDBQ60BXH6"}}, "transform": { "effectiveDateTime": "2018-03-01", "eventReasonCode": {"codeValue": "ATT"} } }}]}	{"events": [{ "data": { "eventContext": {"worker": {"associateOID": "G3M8GYJDBQ60BXH6"}}, "output": {"worker": { "associateOID": "G3M8GYJDBQ60BXH6", "workerDates": {"terminationDate": "2018-03-01"}, "workerStatus": { "statusCode": { "codeValue": "T", "longName": "Terminated" }, "reasonCode": { "codeValue": "ATT", "longName": "Attendance" }, "effectiveDate": "2018-03-01" } }} }, "eventReasonCode": { "codeValue": "TER", "longName": "Termination" } }]}

Application Scope

The canonical URI corresponding to the Worker Terminate API needs to be added in the Consumer Application Registry (CAR) for the subscription following which a user can access this API and make successful API calls.

The following canonical needs to be added to your application scope to enable this use case:

Supported Actors

ADP APIs have built-in data entitlement and access control. The response contains data based on the **roleCode** parameter value in an API request. For example, a person could have two roles defined in an ADP application, a practitioner who manages all employees, and an employee. Your application will use the practitioner **roleCode** to request the data as the practitioner and the **roleCod**e of the employee.

Request Parameter roleCode Value	Is Supported?	Usage when Supported
practitioner		
employee		
manager		
admin		

Request Header Parameters

Sequence of Interactions

The following are the steps shown in the previous diagram:

1. Your consumer application makes a request to the ...
2. Next step.
3. Next step.
4. Your consumer application makes a request to the ...
5. Next step.

Data Dictionary

The client practitioner can manage data controls in the ADP Enterprise HR user interface (UI) by selecting **Setup > Tools > Validation Tables > Payroll > Other Pay Settings > Data Control**.

Schema Location	Field Name	Is it Required in the Request Payload?	Github Sample Request Payload	Github Sample Response Payload	Tips to Handle

Responses

You may encounter exceptions outside your common success scenarios. You must account for these exceptions during your initial development.

For more information, see API Common Exceptions and Tips for Handling.

Response Code	Condition	messageTxt	GitHub Sample Request Payload	GitHub Sample Response Payload	Tips to Handle